



HATIM GROUP


Quality is our commitment



Product Test Certify



ALL PRODUCT BROCHURE



info@hatimgroup.com
hatim_pipes@yahoo.com



Head office:
188/A Jubilee Road,
Chattogram, Bangladesh



Hotline:
09612 117722

Table of Contents

Hatim Product

MS & GI Pipe	: 02-04
MS & GP Box Pipe	: 05-07
EWR Welded Pipe	: 08-09
SS Pipe	: 10-13
uPVC Cover	: 14

Hatim Product

SWR Pipe	: 15-17
Class Pipe	: 18
PPR Pipe	: 19-20
HDPE Pipe	: 21-25
CPVC Pipe	: 26-28

Hatim Product

CPVC Pipe	: 26-28
Conduit & Thread Pipe	: 29
Garden Hose Pipe	: 30
Plumbing Pipe	: 31
Cable Casing Pipe	: 32
Cable Casing Pipe	: 32
Corrugated Pipe	: 33
Section Hose Pipe	: 34

Hatim Product

Bathroom Fittings	: 35-38
Gas Stove	: 39-40
Kitchen Sink	: 41-42
Gas Stove	: 43-45
Cable Tray Pipe	: 46-52
Soket Switch	: 53
Furniture	: 54-58




“HATIM Group of Industries” was formed as a Private Limited Company incorporated on July 03, 2000. The company envisaged with production of various Steel Products: Mild Steel Pipes (MS), Galvanized Pipe (GI), GI Fittings (Hot Dip Galvanized), ASTM A 53 Pipe, Furniture Pipe, Telecommunication Towers etc. and other related products.

Over the last decade of operation, it established its brand image as a pre-eminent supplier of uPVC Class Pipe, uPVC SWR Pipe, uPVC Thread Pipe, uPVC Fittings, HDPE Pipe (Main line, Distribution line & House connection line), HDPE DUCT Pipe (For communication cable), HDPE Drainage Pipe, Suction Hose Pipe, PPR Pipes & Fittings, cPVC pipes & fittings., Bathroom Fittings, Pump etc. with related items.

The Company goodwill motivated to produce Stainless Steel Pipes (SS), Stainless Steel Kitchen Sink, Cable Tray, Gas Stove & All types of Home, Office, Hospital, Industrial, Hotel Furniture's (Metal, LB & Wood) to its customers through product leadership and superior quality.

Its endeavor towards quality production through Hi-Tech manufacturing system led to avail ISO 9001: 2015, ISO 14001:2015 certificates, Product Test Certification from BSTI and BUET. Its strong country wide distribution channel of 5,000 outlets as well as three distribution points created an easy access of its product line to the competitive market.

HATIM MS & GI PIPES

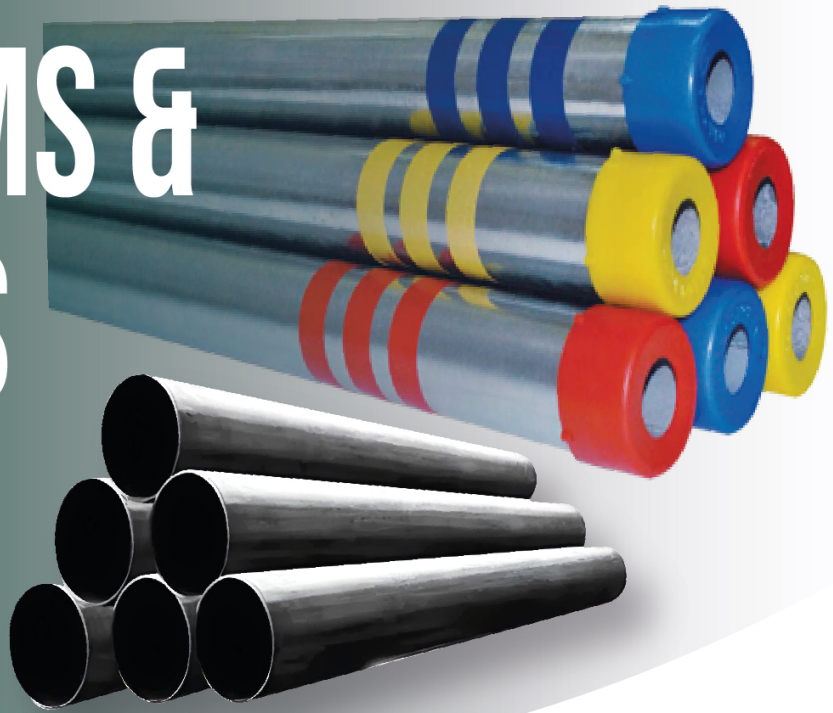

Our organization is engaged in manufacturing a top collection of MS & GI Pipes raw materials of which are sourced from reputed countries all over the world. Hatim MS & GI Pipes are produced as per international standards;

General purpose mild steel Tubes are produced according to the British Standard BS-1387 and Bangladesh Standard BDS-1031. Galvanizing is done according to the British Standard BS-729 which is equivalent to DIN-2444 and IS 4736.

MAIN MATERIAL PERFORMANCE INDEX

Hot Rolled Steel Coils:

- * Grade: JISG-3132 SPHT-1 or SPHT-2
- * Specification: Uncoiled/Unpickled, Non Skin passed. Mill Edge.
- * Origin: India, Taiwan, China

ZINC COATING

- * Generally LME Registered Australian Zinc Ingot -99.995% Minimum Purity
- * Origin: Australia, Japan
- * BS 729/DIN-2444/IS 4736

FEATURES

- * Installed production Capacity: 6000 MT per Month.
- * Production Range: 1/2" to 12 nominal Bore dia pipes.
- * Galvanizing Capacity: Maximum 3000MT per Month.
- * Production process: Electric Resistance Welding (ERW) process employing high frequency welding system, used for manufacturing the the pipe. pipes are galvanized by Hot Dip Galvanizing process as per galvanized ISO 1461/BS 729.
- * Length of pipe: Black Pipes From 1/2" to 12 nominal bore dia and all (20ft) standard lengths, any customies size possible as per customer demand.
- * End finish: GI pipes are bevel-threaded as per BS-21 pipes thread.
- * Black Pipes are either Plain ended or bevelled.

PARTICULARS BS-1387 & BDS-1031

Carbon	0.10	Tensile strength, Psi	46,900	(kg/mm2) min	(19.2)
Phosphorus	0.55	(kg/mm2) min	(33.0)	Elongation on a test 32	
Sulphur	0.06	Yield strenght,psi	27,300	Specimen of 2" gauge length	



Dimension of Mild Steel (MS) & Galvanized Iron (GI) Pipe (BS 1387/BDS 1031 & BS 729)

SL. No.	Pipe size	MS Pipe	GI Pipe	Outer Diameter (mm)	
		Thickness	Thickness	Min	Max
01	1/2" Silver	1.50	1.50	20.30	20.50
02	1/2" Gold	2.00	2.00	20.50	21.00
03	1/2" Diamond	2.35	2.35	20.50	21.00
04	1/2" Ruby	2.65	2.65	20.50	21.00
05	3/4" Silver	1.50	1.50	26.00	26.50
06	3/4" Gold	2.00	2.00	26.40	26.70
07	3/4" Diamond	2.35	2.35	26.40	26.70
08	3/4" Ruby	2.65	2.65	26.40	26.70
09	1" Silver	1.50	1.50	32.00	32.50
10	1" Gold	2.35	2.35	32.50	33.00
11	1" Diamond	2.65	2.65	32.50	33.00
12	1" Ruby	2.90	2.90	32.50	33.00
13	1" Special	3.25	3.25	32.50	33.00
14	1" Special	3.65	3.65	32.50	33.00
15	1 1/4" Silver	1.60	1.60	41.00	41.50
16	1 1/4" Gold	2.35	2.35	41.50	42.00
17	1 1/4" Diamond	2.65	2.65	41.50	42.00
18	1 1/4" Ruby	2.90	2.90	41.50	42.00
19	1 1/4" Special	4.00	4.00	41.50	42.00
20	1 1/2" Silver	1.60	1.60	47.00	47.50
21	1 1/2" Gold	2.65	2.65	47.50	48.00
22	1 1/2" Diamond	2.90	2.90	47.50	48.00
23	1 1/2" Ruby	3.25	3.25	47.50	48.00
24	1 1/2" Special	3.65	3.65	47.50	48.00
25	1 1/2" Special	4.00	4.00	47.50	48.00
26	2" Silver	1.60	1.60	58.50	59.00
27	2" Gold	2.65	2.65	59.00	60.00
28	2" Diamond	2.90	2.90	59.00	60.00
29	2" Ruby	3.25	3.25	59.00	60.00
30	2" Special	3.65	3.65	59.00	60.00
31	2" Special	4.00	4.00	59.00	60.00

SL. No.	Pipe size	MS Pipe	GI Pipe	Outer Diameter (mm)	
		Thickness	Thickness	Min	Max
32	2 1/2" Silver	2.00	2.00	74.00	75.00
33	2 1/2" Gold	2.90	2.90	75.00	75.50
34	2 1/2" Diamond	3.25	3.25	75.00	75.50
35	2 1/2" Special	3.65	3.65	75.00	75.50
36	2 1/2" Ruby	4.00	4.00	75.00	75.50
37	3" Silver	2.00	2.00	88.00	89.00
38	3" Gold	2.90	2.90	88.50	89.50
39	3" Diamond	3.25	3.25	88.50	89.50
40	3" Ruby	3.65	3.65	88.50	89.50
41	3" special	4.0	4.0	88.50	89.50
42	4" Silver	2.00	2.00	112.00	112.50
43	4" Heavy	2.65	2.65	112.50	113.00
44	4" Star	3.00	3.00	112.50	113.00
45	4" Gold	3.65	3.65	112.50	113.00
46	4" Diamond	4.00	4.00	112.50	113.00
47	4" Special	4.50	4.50	112.50	113.00
48	4" Special	5.00	5.00	112.50	113.00
49	5" Silver	3.00	3.00	138.00	139.00
50	5" Gold	4.00	4.00	138.00	139.00
51	5" Diamond	4.85	4.85	138.00	139.00
52	6" Silver	3.00	3.00	163.00	165.00
53	6" Gold	4.00	4.00	164.50	165.50
54	6" Diamond	4.85	4.85	164.50	165.50
55	6" Special	5.00	5.00	164.50	165.50
56	8" Gold	5.00	5.00	218.00	220.00
57	8" Special	6.00	6.00	218.00	220.00
58	8" Diamond	8.00	8.00	218.00	220.00
59	10" Silver	5.00	5.00	272.00	273.00
60	10" Gold	6.00	6.00	272.00	273.00
61	10" Diamond	8.00	8.00	272.00	273.00
62	12" Silver	5.00	5.00	322.00	324.00
63	12" Gold	6.00	6.00	322.00	324.00
64	12" Diamond	8.00	8.00	322.00	324.00



GI FITTINGS (HOT DIP GALVAZISE)



OUR PRODUCT RANGE:

GI FITTINGS PLAIN SECTION

Sl. No.	Size	Product Name								
		ELBOW	TEE	NIPPLE	SOCKET	BEND	UNION	PLUG	END CAP	CROSS TEE
1	1/2"	✓	✓	✓	✓	✓	✓	✓		✓
2	3/4"	✓	✓	✓	✓	✓	✓	✓		✓
3	1"	✓	✓	✓	✓	✓	✓	✓		✓
4	1-1/4"	✓	✓	✓	✓	✓	✓	✓	✓	✓
5	1-1/2"	✓	✓	✓	✓	✓	✓	✓	✓	✓
6	2"	✓	✓	✓	✓	✓	✓	✓	✓	✓
7	2-1/2"	✓	✓	✓	✓	✓	✓	✓	✓	
8	3"	✓	✓	✓	✓	✓	✓	✓	✓	
9	4"	✓	✓	✓	✓	✓	✓	✓	✓	

GI FITTINGS REDUCING SECTION

Sl. No.	Size	Product Name			
		ELBOW	TEE	SOCKET	BUSH
1	1/2"X1/2"				✓
2	3/4"X1/2"	✓	✓	✓	✓
3	1"X1/2"	✓	✓	✓	✓
4	1"X3/4"	✓	✓	✓	✓
5	1-1/4"X1/2"	✓	✓	✓	
6	1-1/4"X3/4"	✓	✓	✓	✓
7	1-1/4"X1"	✓	✓	✓	✓
8	1-1/2"X1/2"	✓	✓	✓	
9	1-1/2"X3/4"	✓	✓	✓	✓
10	1-1/2"X1"	✓	✓	✓	✓
11	1-1/2"X1-1/4"	✓	✓	✓	✓
12	2"X1/2"	✓	✓	✓	
13	2"X3/4"	✓	✓	✓	
14	2"X1"	✓	✓	✓	✓
15	2"X1-1/4"	✓	✓	✓	✓
16	2"X1-1/2"	✓	✓	✓	✓
17	3"X1"	✓	✓	✓	
18	3"X1-1/2"	✓	✓	✓	
19	3"X2"	✓	✓	✓	
20	4"X1-1/2"		✓	✓	
21	4"X2"		✓	✓	
22	4"X3"		✓	✓	



MS & GP HOLLOW BOX

HATIM MS & GP HOLLOW BOX



SQUARE HOLLOW SECTION AS PER ASTM A500

SHS (SQUARE HOLLOW SECTION) SIZE RANGE

Size		Thickness															
inch	mm	0.8	1.0	1.2	1.4	1.5	1.6	2.0	2.2	2.6	3.0	3.2	3.5	4.0	4.5	5.0	6.0
1/2"X1/2"	12.75X12.75	✓	✓	✓	✓												
5/8"X5/8"	15.75X15.75	✓	✓	✓	✓	✓											
3/4"X3/4"	19x19	✓	✓	✓	✓	✓											
1"X1"	25.4X25.4	✓	✓	✓	✓	✓	✓	✓									
	30X30	✓	✓	✓	✓	✓	✓	✓									
1.1/4"X1.1/4"	32X32		✓	✓	✓	✓	✓	✓									
1.1/2"X1.1/2"	38X38		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓				
2"X2"	50.8X50.8		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓				
2.1/2"X2.1/2"	63.5X63.5			✓	✓	✓	✓	✓	✓	✓	✓						
3"X3"	76.2X76.2							✓	✓	✓	✓	✓	✓	✓			
4"X4"	101.4X101.4									✓	✓	✓	✓	✓	✓		
5"X5"	127X127										✓	✓	✓	✓	✓	✓	✓
6"X6"	152.4X152.4										✓	✓	✓	✓	✓	✓	✓
7"X7"	175X175										✓	✓	✓	✓	✓	✓	✓
8"X8"	203.2X203.2													✓	✓	✓	✓

ALLOWABLE STRESS VALUES (IN MPA) & DIMENSIONAL TOLERANCE

Grade	Tensile Strength	Yield Strength		Elongation	
	Min	Min	Min	Min	Min
	MPa	MPa	MPa	Percent	Percent
Yst 210	330		210		20

DIMENSIONAL TOLERANCE				
Outside Dimensional	Thickness	Squarness	Corner radius	Weight
				Individual Lengths
+/-1% with a minimum of +/-0.50 min	+/-7.5%	90 deg +/-2 deg	3t max	On lot of 10 MT
				10%-8%
				+/-7%

Galvanised sections can also be manufactured

*Customised sections can also be manufactured.



RECTANGULAR HOLLOW SECTION AS PER ASTM A500

RHS (RECTANGULAR HOLLOW SECTION) SIZE RANGE

	Thickness																
	Size																
	0.8	1.0	1.2	1.4	1.5	1.6	1.8	2.0	2.35	2.65	2.9	3.0	3.5	4.0	5.0	6.0	
inch																	
3/4"x1/2"	✓	✓	✓														
	✓	✓	✓														
1"x1/2"	✓	✓	✓														
	✓	✓	✓														
1.1/4"x3/4"	✓	✓	✓														
		✓	✓	✓													
1.1/2"x1/2"	✓	✓	✓														
1.1/2"x3/4"			✓	✓	✓	✓	✓	✓									
		✓	✓	✓	✓	✓	✓	✓									
1.1/2"x1"	✓	✓	✓	✓	✓	✓											
2"x1"	✓	✓	✓	✓	✓	✓	✓	✓									
2"x1.1/2"	✓	✓	✓	✓	✓	✓	✓	✓									
2.1/2"x1.1/2"	✓	✓	✓	✓	✓	✓	✓	✓	✓								
	✓	✓	✓	✓	✓	✓	✓	✓	✓								
	✓	✓	✓	✓	✓	✓	✓	✓	✓								
3"x1"			✓	✓	✓	✓	✓	✓									
3"x1.1/2"			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓					
3"x2"			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓				
4"x2"								✓	✓	✓	✓	✓	✓	✓			
4"x3"									✓	✓	✓	✓	✓	✓			
5"x3"									✓	✓	✓	✓	✓	✓			
6"x2"									✓	✓	✓	✓	✓	✓			
6"x3"												✓	✓	✓	✓		
6"x4"												✓	✓	✓	✓		
8"x4"													✓	✓	✓	✓	

TENSILE PROPERTIES OF STEEL TUBES FOR STRUCTURAL PURPOSE

Grade	Tensile Strength	Yield Strength	Elongation on Gauge Length	
			Min	5.65√ s_0 Min
	MPa	MPa	Percent	Percent
Yst 210	330	210		20

TENSILE PROPERTIES OF STEEL TUBES SECTIONS

Grade	Tensile Strength	Yield Strength	Elongation	
			Min	Min
	MPa	MPa	Percent	Percent
Yst 210	330	210		20





HATIM ERW WELDED PIPES ASTM A53 SCH20 & SCH40

ASTM A53 ERW Welded Pipes are used as structural steel or for low pressure plumbing. We manufacture ASTM A53 Type E. Type E is longitudinally electric resistance welded (Grades -A). A53 pipe is sized according to the nominal pipe size (NPS) system. It is commonly available with national pipe thread ends or with plain cut ends or bevelled ends. It can be used for Portable Water & Fire Protection Unit.

Scope:

Scope of ASTM A53 standard specification pipe covers steel, black and hot dipped, zinc-coated, welded. The specification covers welded black and hot dipped galvanized steel pipe in [DN 12 to DN 300]

Application:

ASTM A53 standard steel pipes ordered under this specification is intended for mechanical and pressure applications and is also acceptable for ordinary uses in Water, Gas & Fire line. It is suitable for welding and forming operations involving coiling, Bending and Flanging.



ASTM SCHEDULE PIPE

ASTM A 53 - 2001

SL No	Nominal Size	Outside Diameter		Sch	Nominal Weight					Test Pressure (PSI)	
					Wall Thickness		Plain ends		Weight	Plain ends	
	in	in	mm		in	mm	lb/ft	kg/ft	kg/m		Grade A
01	1/2	0.84	21.3	40	0.109	2.77	0.86	0.39	1.27	STD	700
02	3/4	1.05	26.7	40	0.113	2.87	1.14	0.52	1.69	STD	700
03	1	1.315	33.4	40	0.133	3.38	1.67	0.76	2.5	STD	700
04	1 1/4	1.66	42.2	40	0.14	3.56	2.27	1.03	3.39	STD	1200
05	1 1/2	1.9	48.3	40	0.145	3.68	2.71	1.23	4.05	STD	1200
06	2	2.375	60.3	40	0.154	3.91	3.65	1.66	5.44	STD	2300
07	2 1/2	2.875	73	40	0.203	5.16	5.79	2.63	8.63	STD	2500
08	3	3.5	88.9	40	0.216	5.49	7.57	3.44	11.29	STD	2220
09	4	4.5	114.3	40	0.237	6.02	10.78	4.9	16.07	STD	1900
10	5	5.563	141.3	40	0.258	6.55	14.61	6.64	21.77	STD	1670
11	6	6.625	168.3	40	0.28	7.11	18.94	8.61	28.26	STD	1520
12	8	8.625	219.1	40	0.322	8.18	28.53	12.97	42.55	STD	1340

LIST OF SPECIFICATION OF ASTM SCHEDULE PIPE:

Standard Specification	Applica-tion	Chemical Requirement (max%)				Physical Requirement			Flattening Test	Bend Test	Hydrostatic Test
ASTM A53		C	Mn	p	s	Tensile Strength Psi (mpa)	Yield Strength	Elongation		Angle x Inner Radius	
	A	0.25	0.95	0.05	0.045	Min. 48,000 (33.8kg/mm2)	Min. 30,000 Psi (mpa) (21.1kg/mm2)		H=Distance between Exterior Surface D=outside diameter		P= Test Pressure (psi) S=A.F Stress (Psi)
	B	0.3	1.2	0.05	0.045	Min. 60,000 (42.2kg/mm2)	Min. 35,000 (24.6kg/mm2)	625000 X A0.2/U0.9	Apply for standard weight and extra strong pipe of NB>2in	Apply for NB <2in 90° x 6D when ordered for close coiling 180° X 8D	Specified Respectively in Size and grade Note : the Max P, NB? 2500 Psi NB>3in, P= 2800Psi



HATIM GROUP

Quality is our Commitment

**STAINLESS STEEL
SS PIPE**

Stainless
STEEL
SS PIPES



Real Picture

WE PRODUCE GRADE SS 304 & SS 201



HATIM STEEL STRUCTURE LTD.



Speciality Of Hatim SS Pipe:

- Manufactured by latest advance technology
- Produced by using best quality SS Sheet/Coil
- Proper Strength
- Laser Print
- Right Thickness
- On Time Delivery
- Trained & Expert Production Team
- Perfect Mirror Polish
- Customized Size
- Properly Bendable
- Perfect Welding And Seam
- Accurate Diameter




Usage of Hatim SS pipes & SS Sheets:

- Interior and Exterior Decoration
- Architectural Decoration
- Guardrail
- Window
- Gate
- Furniture Sector
- Handrail
- Balcony
- Door Framing
- Automobile sector
- Flyover Railing
- Medical Equipment
- Industrial Usage
- Lift
- Water Tank/ Vassel
- Kitchen Sink
- Non-Sticky Pan



SS BOX & SS ROUND PIPE

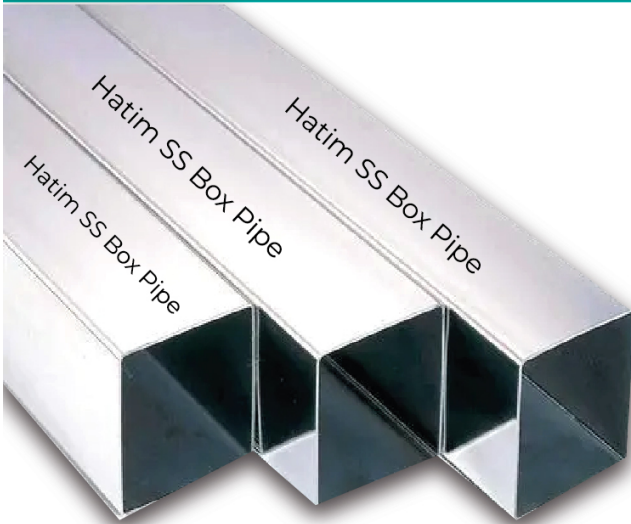


Real Picture



Real Picture

SS DESIGN PIPE

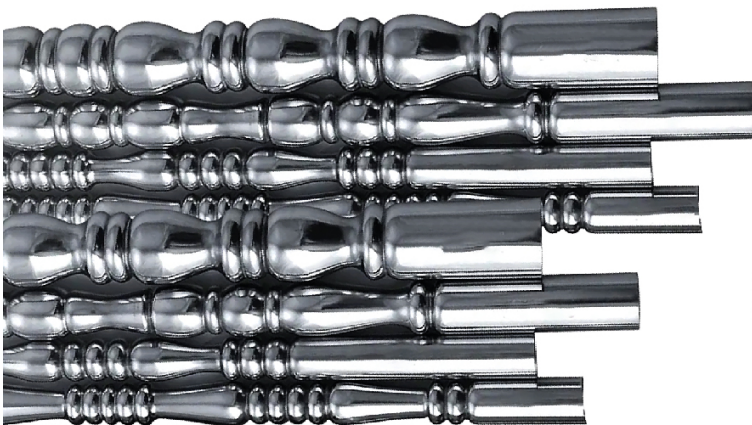

Real Picture





HATIM
Quality is our commitment

Stainless steel Coils:

201 Grade: 2B Finised. Nickel 0.8-1.5%

304 Grade 2B Finished, Nickel 8%

Orgin: China, India & Indonesia

Sl. No.	DIA (Inch)	Thickness										
		0.4mm	0.5mm	0.6mm	0.7mm	0.8mm	1.0mm	1.2mm	1.5mm	2.0mm	2.5mm	3.0mm
01	3/8"	√	√	√	√	√	√					
02	1/2"	√	√	√	√	√	√	√	√			
03	5/8"	√	√	√	√	√	√	√	√			
04	3/4"	√	√	√	√	√	√	√	√	√		
05	7/8"	√	√	√	√	√	√	√	√	√		
06	1"	√	√	√	√	√	√	√	√			
07	1.1/4"			√	√	√	√	√	√	√	√	√
08	1.1/2"			√	√	√	√	√	√	√	√	√
09	2"		√	√	√	√	√	√	√	√	√	√
10	2.1/2"		√	√	√	√	√	√	√	√	√	√
11	3"				√	√	√	√	√	√	√	√
12	4"							√	√	√	√	√
13	1/2"X1/2"			√	√	√	√	√				
14	3/4"X3/4"			√		√	√	√	√			
15	5/8" x 5/8"					√	√					
16	1" x 1"			√	√	√	√	√	√			
17	1.1/4" x 1.1/2"					√	√	√	√			
18	1.1/2" x 1.1/2"			√		√	√	√	√			
19	2" x 2"			√	√	√	√	√	√	√		
20	2" x 1"			√		√	√	√				
21	3" x 1"			√		√	√	√	√			
22	3" x 2"						√	√	√			
23	4" x 2"						√	√	√	√	√	√

HATIM STEEL STRUCTURE LTD.

Product Overview of SS Pipe

Product Test Certify



বিসিটি ইন্স-২০০১:২০০৯

ISO 9001 : 2015
ISO 14001 : 2015




BUET



HATIM

Quality is our commitment

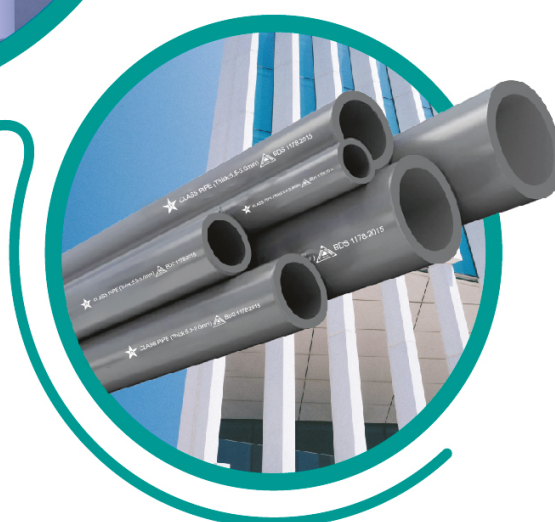

HATIM POLYMER LTD

Morkun, Tongi, Gazipur, Bangladesh

SWR PIPES & FITTINGS

COLOR SCHEME



Our UPVC SWR Pipes As per ISO Standard:

Nominal Outside Diameter dn	ISO 4422: 1990-2(E)							
	S 20 SDR 41 PN 5	S 16.7 SDR 34.4 PN 6	S 16 SDR 33 PN 6.3	S 12.5 SDR 26 PN 8	S 10 SDR 21 PN 10	S 8 SDR 17 PN 12.5	S 6.3 SDR 13.6 PN 16	S 4 SDR 9 PN 25
	Nominal Wall Thickness							
20	--	--	--	--	--	--	1.5	1.8
25	--	--	--	--	--	1.5	1.9	2.8
32	--	--	--	--	1.6	1.9	2.4	3.6
40	--	--	1.5	1.6	1.9	2.4	3.0	4.5
50	--	--	1.6	2.0	2.4	3.0	3.7	5.6
63	1.6	1.9	2.0	2.5	3.0	3.8	4.7	7.1
75	1.9	2.2	2.3	2.9	3.6	4.5	5.5	8.4
90	2.2	2.7	2.8	3.5	4.3	5.4	6.7	10.1

Nominal Outside Diameter dn	ISO 4422: 1990-2(E)							
	S 20 SDR 41 PN 6	S 16 SDR 33 PN 8	S 10 SDR 21 PN 10	S 8 SDR 17 PN 12.5	S 6.3 SDR 13.6 PN 16	S 6.3 SDR 13.6 PN 20	S 5 SDR 9 PN 25	
	Nominal Wall Thickness							
110	--	2.7	3.4	4.2	5.3	6.6	8.1	10.0
125	--	3.1	3.9	4.8	6.0	7.4	9.2	11.4
140	--	3.5	4.3	5.4	6.7	8.3	10.3	12.7
160	--	4.0	4.9	6.2	7.7	9.5	11.8	14.6
180	--	4.4	5.5	6.9	8.6	10.7	13.3	16.4
200	--	4.9	6.2	7.7	9.6	11.9	14.7	18.2
225	--	5.5	6.9	8.6	10.8	13.4	16.6	--
250	--	6.2	7.7	9.6	11.9	14.8	18.4	--
280	--	6.9	8.6	10.7	13.4	16.6	20.6	--
315	--	7.7	9.7	12.1	15.0	18.7	23.2	--
355	--	8.7	10.9	13.6	16.9	21.1	26.1	--
400	--	9.8	12.3	15.3	19.1	23.7	29.4	--
450	--	11.0	13.8	17.2	21.5	26.7	33.1	--



HATIM GROUP

Quality is our commitment



COLOR SCHEME



GREY



WHITE

HATIM
SWR PIPES

info@hatimgroup.com | hatim_pipes@yahoo.com

www.hatimgroup.com

HATIM-16

HATIM SWR DIMENSION CHART AS PER MARKET DEMAND

Pipe Size	Out Side Dia Mean OD (Stn) in mm		Wall Thickness in mm	
			Standard	Target
	Min.	Max.	Min.	Max.
32mm	36.20	36.50	1.50	1.70
40mm	42.80	43.40	1.90	2.10
40mm	42.80	43.40	2.30	2.60
50mm	55.70	56.40	1.80	2.00
50mm	55.70	56.40	2.30	2.50
75mm	75.00	75.30	1.80	1.90
80mm	82.30	83.00	1.80	1.90
80mm	82.30	83.00	3.00	3.50
110mm	110.00	110.60	2.00 (Avg.)	2.00 (Avg.)
110mm	110.00	110.60	2.50	2.70
110mm	110.00	110.60	2.70 (Avg.)	2.70 (Avg.)
110mm	110.00	110.60	2.70	3.00
110mm	110.00	110.60	3.00(Avg.)	3.00(Avg.)
110mm	110.00	110.60	3.00	3.40
110mm	110.00	110.60	3.20	3.60
110mm	140.00	140.40	3.40	4.00
160mm	160.00	160.50	2.50	2.80
160mm	160.00	160.50	2.70	3.00
160mm	160.00	160.50	3.00(Avg.)	3.00(Avg.)
160mm	160.00	160.50	4.50	5.00
200mm	200.00	200.60	2.50	3.00
200mm	200.00	200.60	3.10	3.50
200mm	200.00	200.60	4.00(Avg)	4.00 (Avg.)
200mm	200.00	200.60	4.00	4.50
200mm	200.00	200.60	4.90	5.50
250mm	250.00	250.70	3.90	4.40
280mm	280.00	280.90	8.60	9.00
315mm	315.00	316.00	9.70	10.10
355mm	355.00	356.10	10.90	11.40



COLOR SCHEME



GREY




WHITE

CLASS PIPES

Our uPVC Pipe as per BS Standard:

British Standard (BS) 3505: 1968										
Nominal Size	Outside Diameter		Class B 6 Bar		Class C 9 Bar		Class C 9 Bar		Class D 12 Bar	
			Wall Thickness		Wall Thickness		Wall Thickness		Wall Thickness	
Inch	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
0.50"	21.2	21.5	--	--	--	--	--	--	1.7	2.1
0.75"	26.6	26.9	--	--	--	--	--	--	1.9	2.5
1.00"	33.4	33.7	--	--	--	--	--	--	2.2	2.7
1.25"	42.1	42.4	--	--	--	--	2.2	2.7	2.7	3.2
1.50"	48.1	48.4	--	--	--	--	2.5	3.0	3.1	4.5
2.00"	60.2	60.5	--	--	2.5	3.0	3.1	3.7	3.9	4.5
3.00"	88.7	89.1	2.9	3.4	3.5	4.1	4.6	5.3	5.7	6.6
4.00"	114.1	114.5	3.4	4.0	4.5	5.2	6.0	6.9	7.3	8.4
5.00"	140.0	140.4	3.8	4.4	5.5	6.4	7.3	8.4	9.0	10.4
6.00"	168.0	168.5	4.5	5.2	6.6	7.6	8.8	10.2	10.8	12.5
8.00"	218.8	219.4	5.3	6.1	7.8	9.0	10.2	11.9	12.6	14.5
9.00"	244.1	244.8	5.9	6.8	8.7	10.0	11.5	13.3	14.1	15.8
10.00"	272.6	273.4	6.6	7.6	9.7	11.2	12.8	14.8	15.7	18.1
12.00"	323.4	324.3	7.8	9.0	11.5	13.3	15.2	17.5	18.7	21.6
14.00"	355.0	356.0	8.5	9.8	12.6	14.5	16.7	19.2	20.5	23.6
16.00"	405.9	406.9	9.7	11.2	14.5	16.7	19.0	21.9	23.4	27.0
18.00"	456.7	457.7	11.0	12.7	16.3	18.8	21.4	24.6	--	--

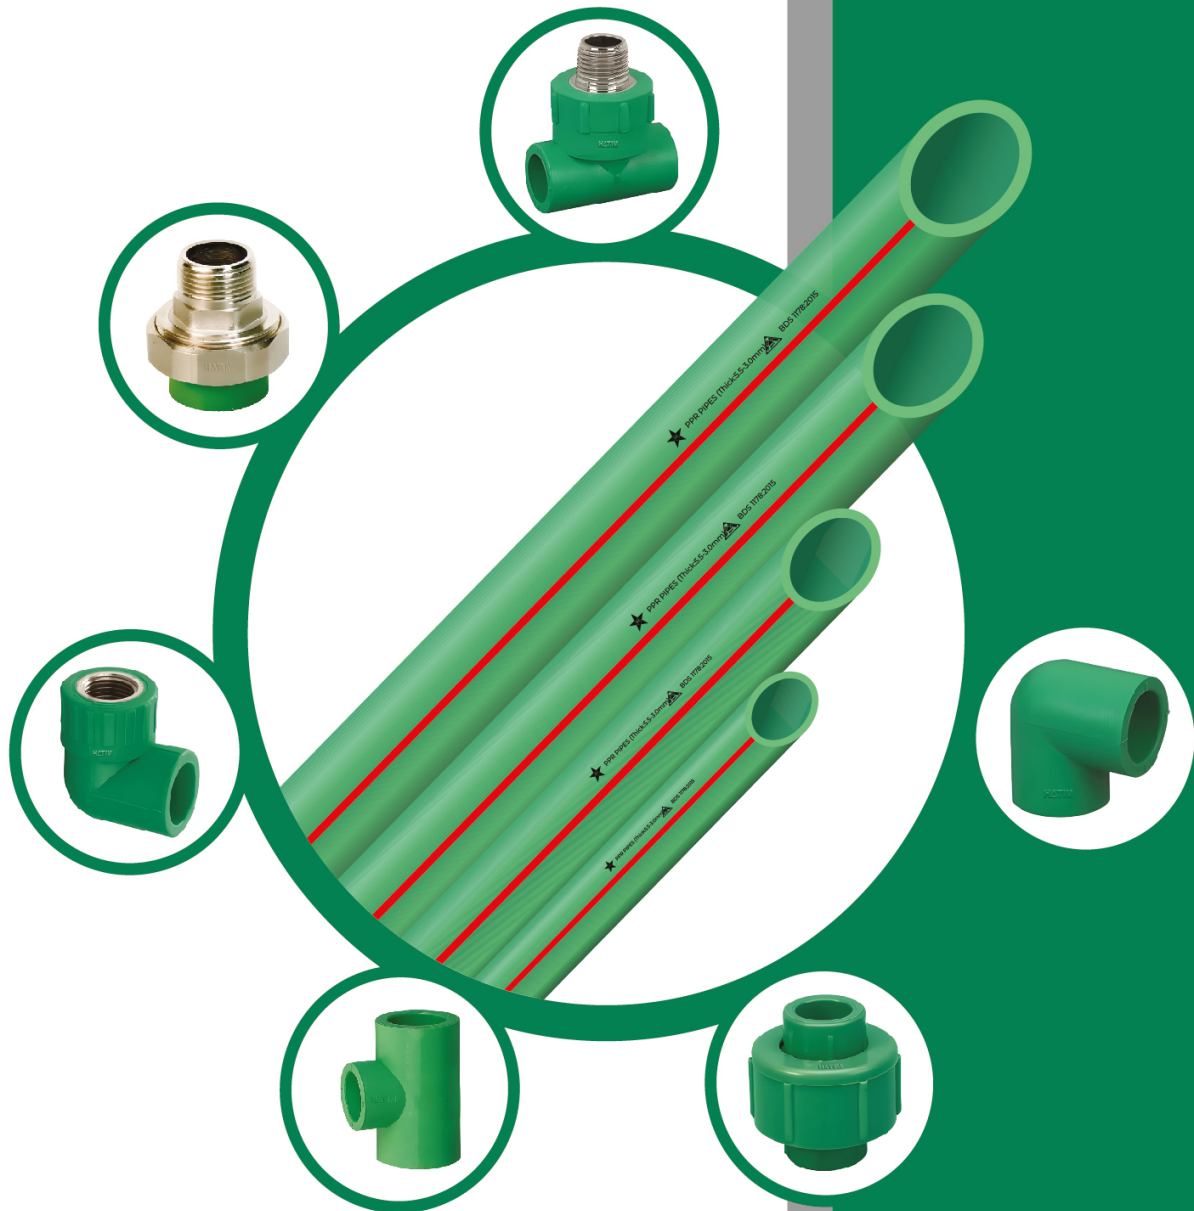

PPR PIPES & FITTINGS



HATIM
Quality is our commitment

SPECIFICATION FOR PPR PIPES

(Pipe standard DIN - 8078 & ISO - 15874 - 2013)

SIZE IN INCH	SIZE/O.D IN MM	COLD WATER		HOT WATER		
		PN- 10/SDR-11	PN- 12.5/SDR-9	PN- 16/SDR-7.4	PN- 20/SDR-6	PN- 25/SDR-5
		Thickness	Thickness	Thickness	Thickness	Thickness
1/2"	20+0.3	1.9	2.3	2.8	3.4	4.1
3/4"	25+0.3	2.3	2.8	3.5	4.2	5.1
1"	32+0.3	2.9	3.6	4.4	5.4	6.5
1 1/4"	40+0.4	3.7	4.5	5.5	6.7	8.1
1 1/2"	50+0.5	4.6	5.6	6.9	8.3	10.1
2"	63+0.6	5.8	7.1	8.6	10.5	12.7
2 1/2"	75+0.7	6.8	8.4	10.3	12.5	15.1
3"	90+0.9	8.2	10.1	12.3	15.0	18.1
4"	110+1.0	10.0	12.3	15.1	18.3	22.1

Features :

- PP-R pipe and fittings can be used for cold and hot water.
- High temperature resistance, high pressure resistance and good resistance to Chemical corrosion.
- Long service life, healthy, non-toxic, sanitary and recyclable.
- Light weight, easy to handle and transport.
- Smooth inner wall, reducing pressure loss and increasing flow speed.
- Hot welding connection adopted making pipes and fittings into a whole, leakage effectively prevented.



HATIM POLYMER LTD



HDPE PIPES & FITTINGS

ISO 4427



Hatim Polymer Ltd. (ISO 9001:2015 Certified co.)
HDPE PIPE (Thick: 5.5-3.0mm) BDS 1178:2015



HATIM-21



HATIM GROUP

Quality is our commitment

Hatim Polymer Ltd. (iso 9001:2015 Certified co.)
upvc HDPE pipe(thick:5.5-3.0mm) BDS 1178:2015

HATIM HDPE PIPES



STRENGTH



QUANTITY




ENDURING


info@hatimgroup.com
hatim_pipes@yahoo.com
www.hatimgroup.com

HATIM-22


Application Of HDPE PIPE

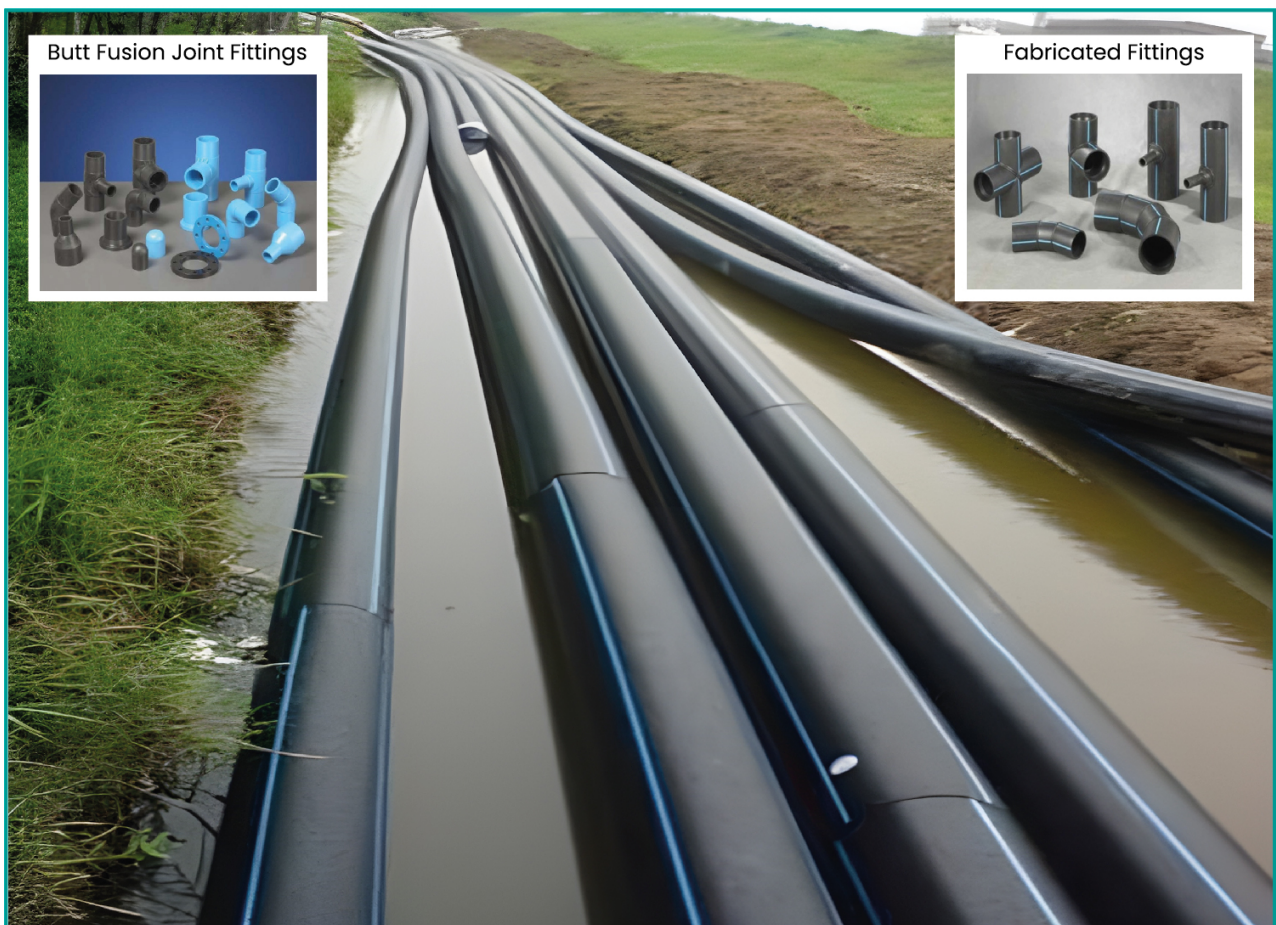

Butt Fusion Joint Fittings



Fabricated Fittings



WALL THICKNESS CHART OF HATIM HDPE PIPES

(AS PER ISO 4427 : 2007)

Nomina Out Side Diameter			Pipe Series 1			
			S-8	S-6.3	S-5	S-4
			Standard Diamention Ration			
			SDR-17	SDR-13.6	SDR-11	SDR-9
			Nominal Pressure PN 2 For Os= 8MPa			
	PN-6	PN-8	PN-10	PN-12.5	PN-16	PN-20
			Nominal Wall Thickness, en mm			
20	-	1.0	1.2	1.5	2.0	2.3
25	-	1.2	1.5	2.0	2.3	3.0
32	-	1.5	2.0	2.4	3.00	3.63
40	-	2.0	2.4	3.0	3.70	4.53
50	1.8	2.4	3.0	3.7	4.60	5.67
63	2.4	3.0	3.8	4.70	5.80	7.14
75	2.7	3.6	4.50	5.60	6.80	8.50
90	3.3	4.30	5.40	6.70	8.20	10.20
110	4.0	5.30	6.60	8.10	10.00	12.47
125	4.5	6.00	7.40	9.20	11.40	14.17
140	5.1	6.70	8.30	10.30	12.70	15.87
160	5.8	7.70	9.50	11.80	14.60	18.13
180	6.5	8.60	10.70	13.30	16.40	20.40
200	7.2	9.60	11.90	14.70	18.20	22.67
225	8.2	10.80	13.40	16.60	20.50	25.50
250	9.1	11.90	14.80	18.40	22.70	28.33
280	10.1	13.40	16.60	20.60	25.40	31.73
315	11.4	15.00	18.70	23.20	28.60	35.70
355	12.9	16.90	21.10	26.10	32.20	40.23
400	14.5	19.10	23.70	29.40	36.30	45.33
450	10.3	21.50	26.70	33.10	40.90	51.00
500	-	23.90	29.70	36.80	45.40	56.67
560	-	26.70	33.20	41.20	50.80	63.47
630	-	30.00	37.40	46.20	57.20	71.40


Assembly Instruction

Compression fittings 20mm-63mm



Prepare:

Prepare the necessary tools.

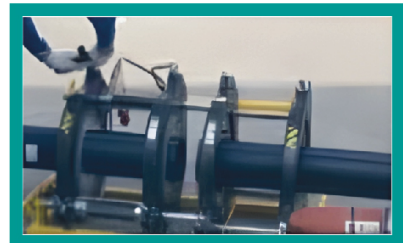

Clamp And Clean:

Clamp down the pipe on the jig, clean up the joint part, mill the joint sides, and then adjust the joint parts to make the misplacement less than 100% of the wall thickness.



Heat:


Put the heating panel.



Fabricated HDPE fittings.




Fabricated Fittings:
Butt fusion welding machine for Making Fabricated HDPE Fittings.

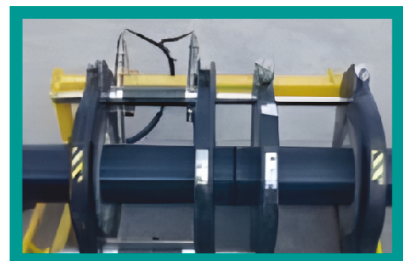

Join:

Remove the heating panel after Finishing heating, join the two heating Parts swiftly, increase pressure up to The fusion joint pressure and keep until It cools down.

HATIM HDPE COIL PIPE & HDPE DUCT PIPE (OFC)

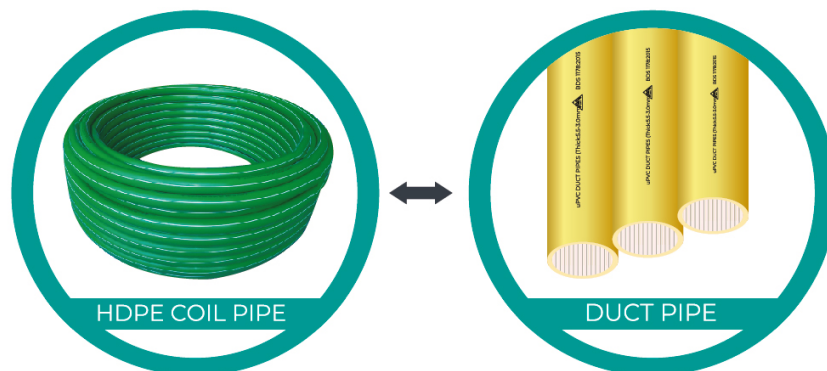


Hatim HDPE COIL PIPE

Pipe Size	Outside Dia Mean OD in (mm)		Wall Thickness Standard in (mm)	Coil Size (Meter)
	Min.	Max.	Min.	Target
1/2"	20.40	20.60	2.00	100,300,500
3/4"	26.40	26.60	2.20	100,300,500
1.0"	33.10	33.30	2.20	100,300,500
1.25"	40.10	40.50	2.40	100,300,500
1.50"	48.10	48.60	2.40	100,300,500

HATIM HDPE PLB DUCT PIPE (OFC)

Pipe Size	OD (mm)	ID (mm)	Wall Thickness Standard in (mm)	Coil Size (Meter)
40/33	40.00	33.00	3.5±0.2	300,500,1000
50/43	50.00	43.00	3.5±0.2	300,500,1000

HATIM CPVC PIPES & FITTINGS

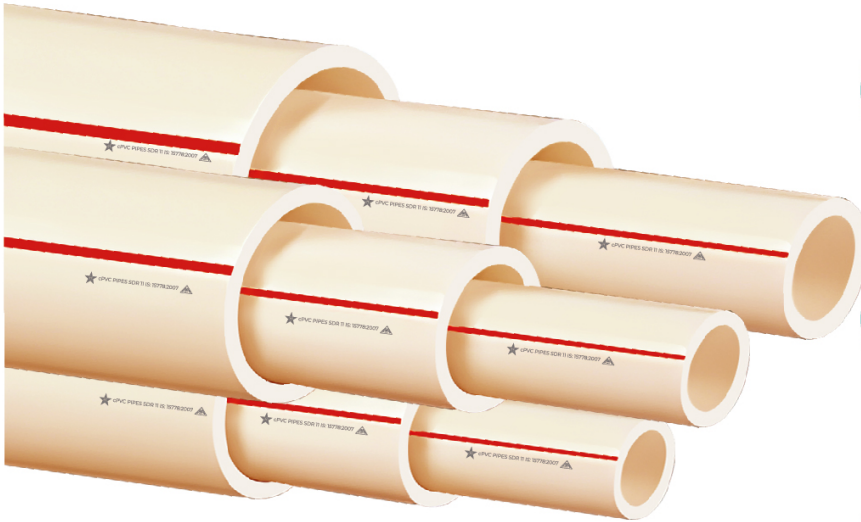

CPVC STANDARD

Pipe Size	SDR	out Side Dia Mean OD in (mm)		Wall Thickness Standard in (mm)
		Min.	Max.	Min.
1/2"	SDR-11	15mm	15.9mm	1.73
3/4"	SDR-11	20mm	22.2mm	2.03
1.0"	SDR-11	25mm	28.6mm	2.59
1.25"	SDR-11	32mm	34.9mm	3.18
1.50"	SDR-11	40mm	41.3mm	3.76
2"	SDR-11	50mm	54.0mm	4.90
2.5"	SCH-40	65mm	73.0mm	5.16
3"	SCH-40	80mm	88.9mm	5.49
4"	SDR-13.5	100mm	114.3mm	6.02
1/2"	SDR-13.5	15mm	15.9mm	1.40
3/4"	SDR-13.5	20mm	22.2mm	1.65
1.0"	SDR-13.5	25mm	28.6mm	2.03
1.25"	SDR-13.5	32mm	34.9mm	2.59
1.50"	SDR-13.5	40mm	41.3mm	3.06
2"	SDR-13.5	50mm	54.0mm	4.00
2.5"	SCH-80	65mm	73.0mm	7.01
3"	SCH-80	80mm	88.9mm	7.62
4"	SCH-80	100mm	114.3mm	8.56

93° c	5.52	4.36
82° c	6.80	5.50
77° c	9.00	7.09
71° c	11.04	8.72
66° c	12.50	9.81
60° c	13.80	10.90
54° c	15.90	12.55
49° c	18.00	14.20
43° c	20.30	16.05
38° c	22.65	17.90
32° c	25.12	19.80
27° c	27.60	21.80
	SDR-11	SDR-13.5
Operating Temperature	1/2", 3/4", 1"	1 1/4", 1 1/2" & 2"

Hatim cPVC

The latest Cost effective and reliable plumbing system for hot and cold water:

CPVC PIPES			CPVC FITTING		
Class of Pipe	Standard	Size available	Class of Pipe	Standard	Size available
Class-1/SDR-11	IS: 15778 ASTM D 2846	½" - 2"	SDR - 11	ASTM D2846	½"-2"
Class-2/SDR-13.5	IS: 15778:2007 ASTM D 2846	½" - 2"	SDR - 40	ASTM F 438	2½"-4"
SCH-40	ASTM F 441	2½"-8"	SDR - 80	ASTM F 439	2½"-8"
SCH-80	ASTM F 441	2½"-8"	Solvent Cement	ASTM F 493	

TECNICAL DETAILS

Dimensional detail of SDR-11 (Class-1) and SDR -13.5 (Class-2)

CPVC Pipes Conforming to IS: 15778:2007

Sr. No.	Size (mm)	outside Diameter(mm)		Tolerance	Min.Wall Thickness(mm)	
01.	15 (1/2")	15.80	16.00	±0.08	1.70	1.40
02.	20 (3/4")	22.20	22.40	±0.08	2.00	1.70
03.	25 (1")	28.40	28.80	±0.08	2.60	2.00
04.	32 (1.1-4")	34.70	35.10	±0.08	3.20	2.20
05.	40 (1.1/2")	41.10	41.50	±0.10	3.80	3.10
06.	50 (2")	54.30	54.70	±0.10	4.90	4.00

DIMENSION DETAIL OF SCH - 40&SCH-80 CPVC PIPES AS PER ASTM F 441

Nominal Size		Average O.D. (mm)		Tolerance	Min. Wall Thickness (mm)	
2½"	65	73.00	73.00	±0.18	5.16	7.01
3"	80	88.90	88.90	±0.20	5.49	7.62
4"	100	114.30	114.30	±0.23	6.02	8.56
6"	150	168.30	168.30	±0.28	7.11	10.97
8"	200	219.10	219.10	±0.38	8.18	12.70

Note: The above pressure rating does not reflect the superior pressure rating for Flowline plus system.

Ajay recommends that these pressure ratings only be used till the upgraded material is incorporated in the relevant standards.

WORKING PRESSURE DETAILS OF SCH-40 & SCH-80 PIPE

Pressure vs. temperature rating hart for CPVC 4120 as per ASTM F 441

Class	Size (mm)	27°C	32°C	38°C	43°C	49°C	54°C	60°C	66°C	71°C	77°C	82°C	93°C
SCH -40	65 (2-1/2")	21.09	18.49	17.3	16.2	13.71	13.08	10.55	9.91	8.44	6.75	5.27	4.22
	80 (3")	18.29	16.64	14.99	14.1	11.88	11.33	9.14	8.59	7.31	5.85	4.57	3.66
	100 (4")	15.47	14.08	12.68	11.9	10.05	9.59	7.73	7.27	6.19	4.95	3.87	3.09
	150 (6")	12.66	11.52	10.38	9.74	8.23	7.85	6.33	6.33	5.06	4.05	3.1	2.53
	200 (8")	11.2	10.19	9.18	9.18	7.28	7.28	5.6	5.6	4.48	4.48	2.8	2.24
SCH -80	65 (2-1/2")	29.53	26.87	24.21	22.7	19.19	18.31	13.88	13.88	11.81	9.45	7.38	5.91
	80 (3")	26.01	23.67	21.67	20	16.91	16.13	12.23	12.23	10.41	8.32	6.5	5.2
	100 (4")	22.5	20.47	18.45	17.3	14.62	13.95	10.57	10.57	9	7.2	5.62	4.5
	150 (6")	19.69	17.91	16.41	15.2	12.8	12.21	9.84	9.25	7.87	6.3	4.32	3.94
	200 (8")	17.5	15.75	14.35	14.4	11.38	11.38	8.75	8.75	7	7	4.38	3.5

Why Hatim cPVC?

Parameters	uPVC	PPR	cPVC
Temperature	Used for higher temperature application up to 60 °C maximum	Used for higher temperature application up to 80° C maximum	Used for higher temperature application up to 93°C maximum
Jointing Time	Few minutes needed for jointing.	Few seconds needed for jointing.	Nano seconds needed for jointing.
Standard Length	6m	3-6m	6m
Line commissioning	24 hours	Immediate	24 hours

Chlorinated Poly (Vinyl Chloride) (CPVC) is a thermoplastic pipe and fitting material made from CPVC compounds that meet the ASTM Class 23447 specifications as specified in ASTM Specification D1784.

Potable water delivery, corrosive fluid processing in industry, and fire control systems are all usage of CPVC.

Industrial CPVC pipe is extruded in diameters ranging from ¼" to 12" to Sch 40, Sch 80, and SDR dimensions.

Extrusion produces CPVC pipe for plumbing systems in sizes ranging from ¼" to 2" copper tube size (CTS).

CTS plumbing devices are made to ASTM D2846 standards for copper tube outside diameter dimensions and have an SDR 11 wall thickness.

The CTS SDR 11 systems have pressure ratings of 400 psi (pounds per square inch) at 73°F and 100 psi at 180°F.

CPVC plumbing pipe is sold in both straight lengths and (in small diameters) coils.

CPVC materials are resistant to many everyday household chemicals.

CPVC piping systems are:


- Environmentally friendly
- Provide long service life
- Easy to install and handle
- Corrosion resistant
- Cost effective
- Widely accepted by codes

CPVC materials cannot burn without an external fuel supply because they do not support combustion.

For fire sprinkler systems, this property makes CPVC pipe an appealing alternative to steel and copper pipe.

CPVC fire sprinkler piping systems are certified for use in single and multifamily residences and for light danger applications.

NFPA Section 13 must be followed during installation.

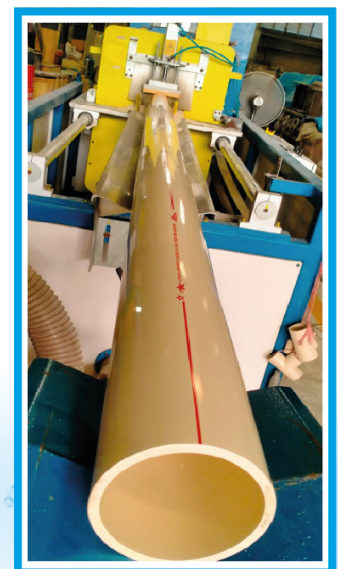

HATIM ELECTRIC CONDUIT PIPES & FITTINGS




HATIM GROUP



PVC Electric Conduit Pipe STANDARD

No.	Size	Outer Dia (mm)	Inner Dia (mm)	Thickness	Length (mm)	Standard
01.	PVC Conduit (25)	26.60	22.70	1.9mm	3000/3750mm	BS 4607/BS EN 61386
02.	PVC Conduit (32)	32.60	26.20	2.7mm	3000/3750mm	BS 4607/BS EN 61386
03.	PVC Conduit (50)	49.80	42.70	3.4mm	3000/3750mm	BS 4607/BS EN 61386
04.	PVC Conduit (70)	75.00	69.00	2.9mm	3000/3750mm	BS 3505; 1986
05.	PVC Conduit (100)	114.10	107.30	3.4mm	3000/3750mm	BS 3505; 1986
06.	PVC Conduit (125)	140.00	132.40	3.3mm	3000/3750mm	BS 3505; 1986
07.	PVC Conduit (150)	168.00	159.00	4.5mm	3000/3750mm	BS 3505; 1986

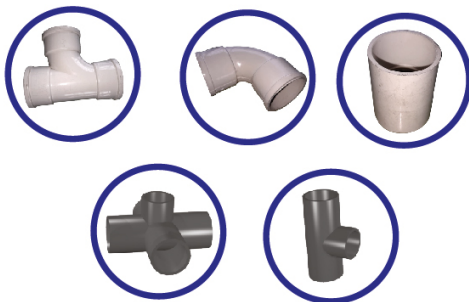

Standard : NEMA TC-2 and WC 1094 (Heavy Wall rigid Type 40)

Conduit Nominal Size		OD		ID		Wall Thickness	
Inch	mm	Inch	mm	Inch	mm	Inch	mm
1/2 "	20	0.84	21.34	0.622	15.80	0.109	2.77
3/4 "	25	1.05	26.67	0.824	20.93	0.113	2.87
1 "	32	1.315	33.40	1.049	26.64	0.113	2.87
1.25 "	42	1.66	42.16	1.38	35.05	0.140	3.56
1.50 "	48	1.9	48.26	1.61	40.89	0.145	3.68
2 "	60	2.375	60.33	2.067	52.50	0.154	3.91

HATIM THREAD PIPE & FITTINGS

Thread Pipe Standard-BS 3505 (SCH-80)




Nominal Size	Outside Diameter		Wall Thickness	
	Min	Max	Min	Max
1/2" (0.50")	21.20	21.50	3.10	3.70
0.75"	26.60	26.90	3.40	4.00
1.00"	33.30	33.80	3.80	4.40
1.25"	42.00	42.50	4.30	4.90
1.5"	48.00	48.50	4.40	5.00
2.00"	60.00	60.70	4.60	5.20

Thread Pipe Standard-BS 3505 (SCH-40)

Nominal Size	Outside Diameter		Wall Thickness	
	Min	Max	Min	Max
1/2" (0.50")	21.20	21.50	2.80	3.20
0.75"	26.60	26.90	2.90	3.30
1.00"	33.30	33.80	3.40	3.80
1.25"	42.00	42.50	3.60	4.00
1.5"	48.00	48.50	3.70	4.10
2.00"	60.00	60.70	3.90	4.30



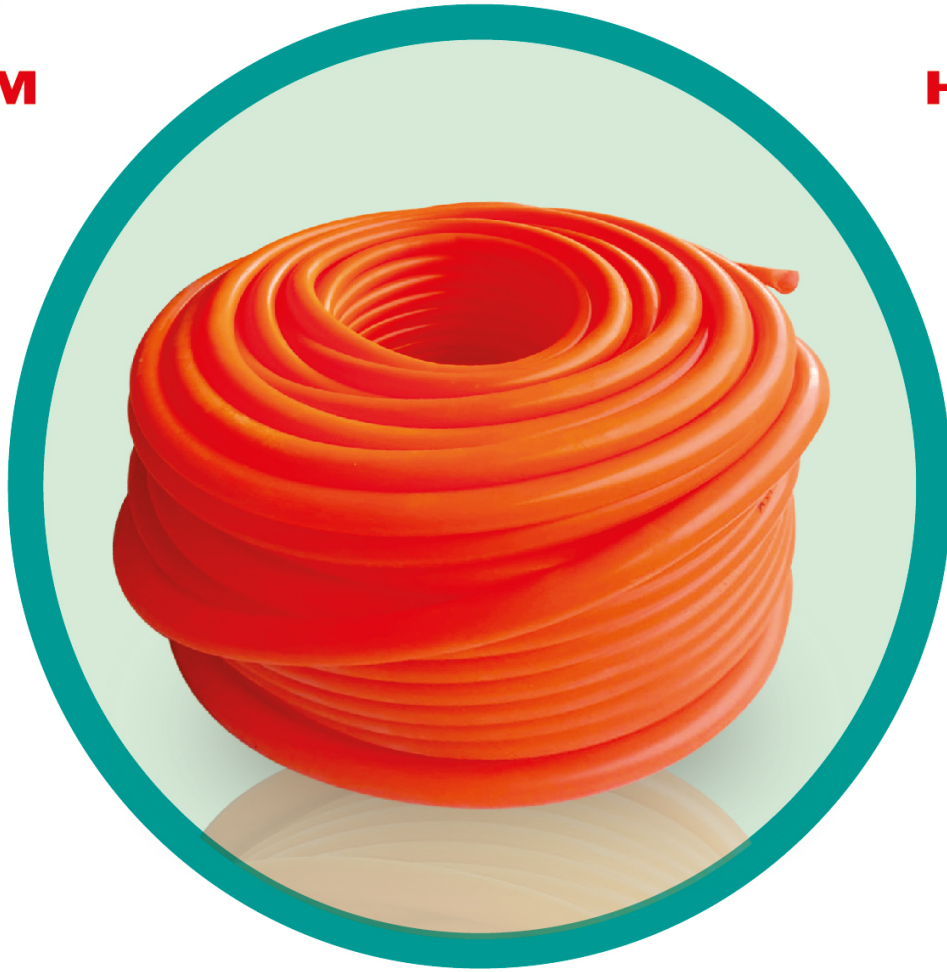


HATIM GARDEN HOSE PIPE

Quality is our Commitment

Hatim Garden Hose Pipe is extra thick that don't kink or twist. Hassle-free use all around the garden. It is the best choice for gardening and car washing.


Pipe Size	Class/Grade	In side Dia in (mm)		Wall Thickness In (mm)		Weight/Coil In (kg)		Length
		Min.	Mix.	Min.	Mix.	Min.	Mix.	St.rd
3/4"		21.20	21.50	1.20	1.40	19.000	20.000	500
1.0"	Garden/N	26.60	26.90	1.20	1.40	26.000	27.000	500
1.25"		33.40	33.70	1.20	1.40	33.000	34.000	500

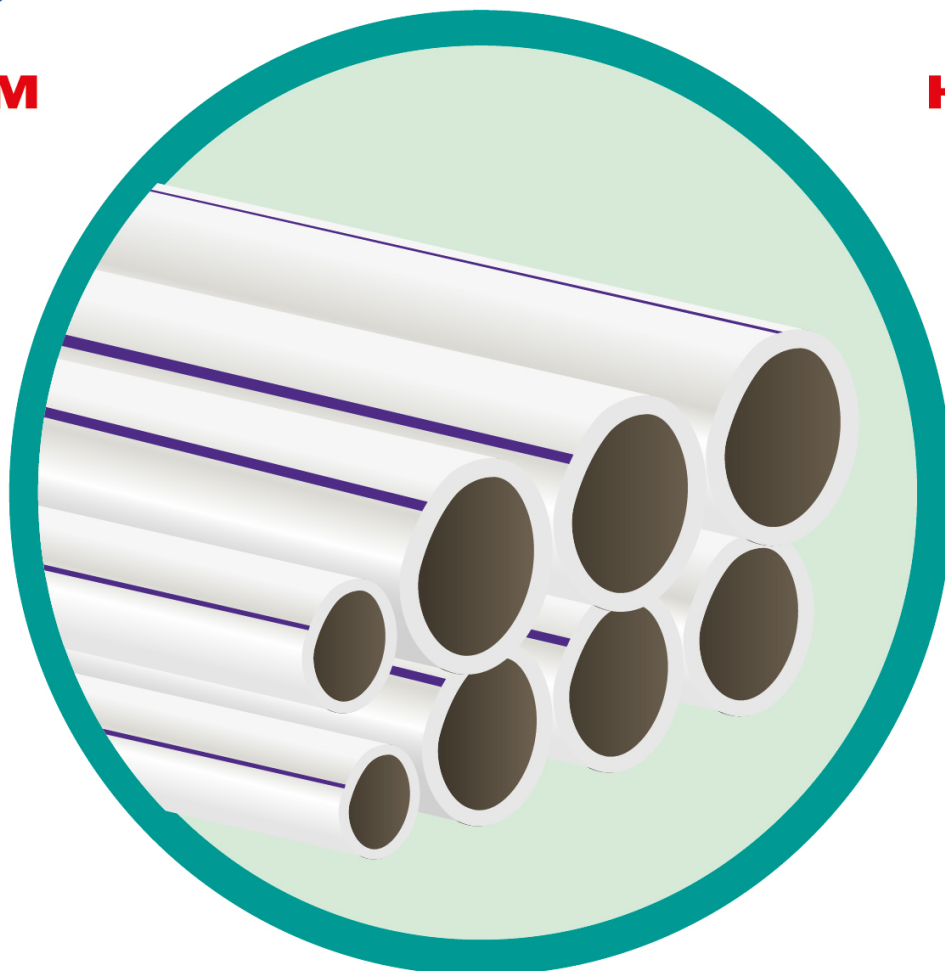

HATIM PLUMBING PIPES

Quality is our Commitment


Pipe Size	Class	Out Side Dia in (mm)		Wall Thickness in (mm)		Lenght / pc in Ft
		Mean OD		Individual		St'rd
		(Min.)	(Max.)	(Min.)	(Max.)	
1/2"	Plumbing (White)	21.20	21.50	2.80	3.20	10
3/4"	Plumbing (White)	26.60	26.90	2.90	3.30	10
1.0"	Plumbing (White)	33.40	33.70	3.40	3.80	10
1.25"	Plumbing (White)	42.10	42.40	3.60	4.00	10
1.5"	Plumbing (White)	48.10	48.40	3.70	4.10	10
2.0"	Plumbing (White)	60.20	60.50	3.90	4.30	10

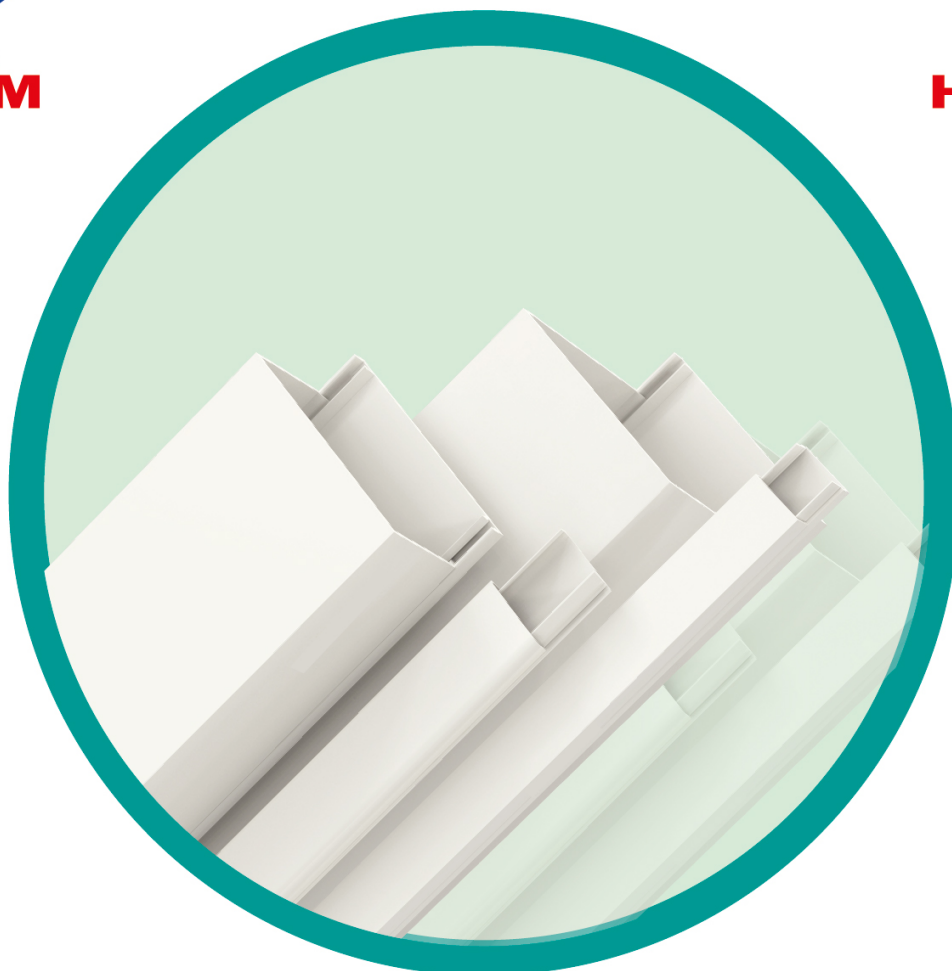

HATIM CABLE CASING PIPES

Quality is our Commitment


Pipe Size	Class/PN	Out Side Dia Mean OD in (mm)		Wall Thickness Standard in (mm)	Lenght
		Min.	Mix.	Min.	St'nd
1/2"	Cable Casing	15	15.10	0.65	6
3/4"		19	19.10	0.65	6
1.0"		25	25.10	0.75	6
1.25"		32	32.10	0.70	6
1.50"		38	38.10	0.90	6
2"		50	50.10	1.00	6

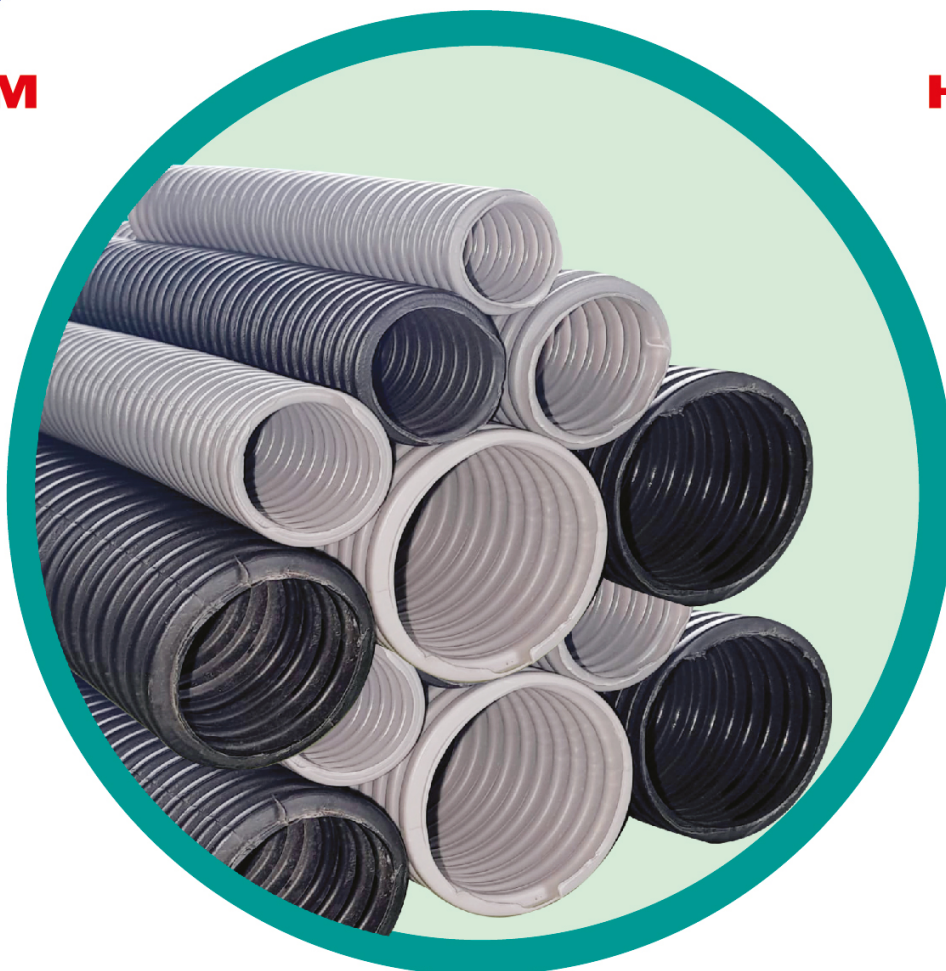

HATIM CORRUGATED PIPES

Quality is our Commitment

Pipe Size	Class/PN	Out Side Dia Mean OD in (mm)		Wall Thickness Standard in (mm)	Lenght
		Min.	Mix.	Min.	St'nd
3/8"	Corrugated Coil Pipe	10.80	10.90	0.40	100
1/2"		17.40	17.50	0.30	100
3/4"		21.70	21.80	0.40	100
1.0"		27.10	27.20	0.40	100
1.25"		34.60	34.80	0.40	100
1.50"		40.80	40.90	0.50	100
2"		53.80	53.90	0.50	100

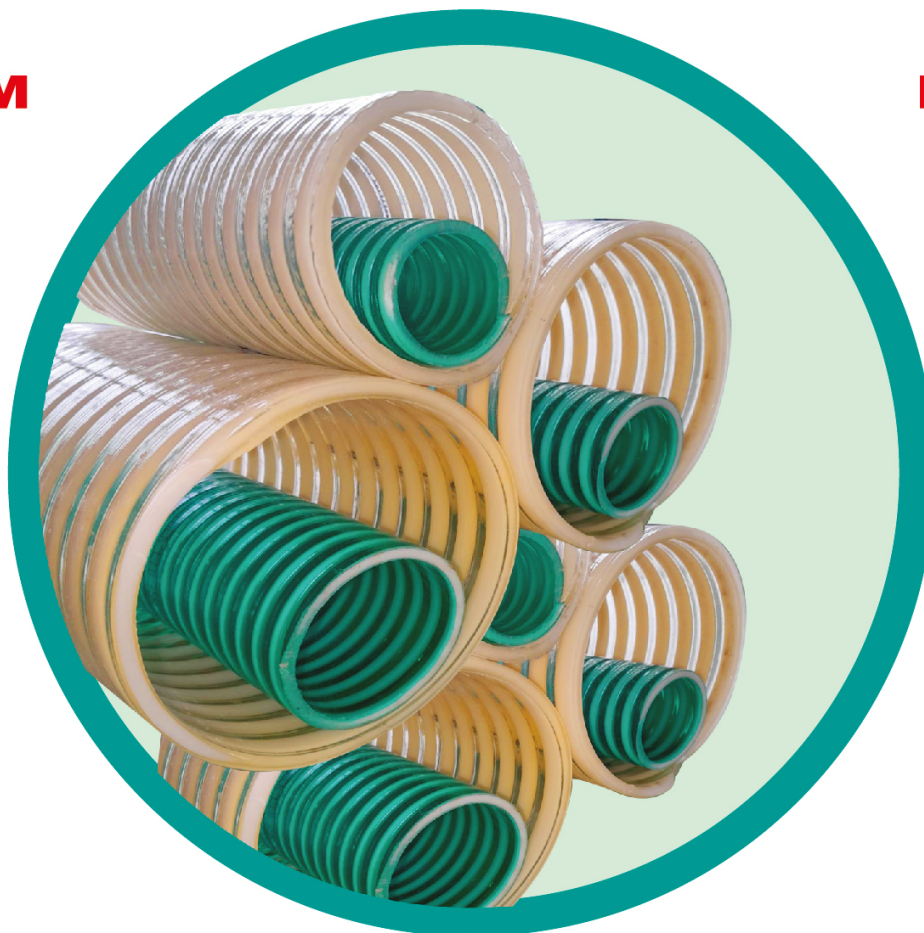

HATIM SUCTION HOSE PIPE

Quality is our Commitment

Pipe Size	Class/PN	Out Side Dia in (mm)		Wall Thickness Standard in (mm)		Lenght
		Min.	Mix.	Min.	Mix.	St'nd
3/4"	Normal	18.75	19.05	3.50	3.80	100
1.0"	Normal	25.00	25.40	3.80	4.00	100
1.25"	Normal	31.25	31.75	4.00	4.40	100
1.50"	Normal	37.50	38.10	3.90	4.30	100
2.00"	Normal	50.00	50.80	4.20	4.60	100
2.50"	Normal	62.50	63.50	4.40	4.80	100
3.00"	Normal	75.00	76.20	4.20	4.40	100
4.00"	Normal	100.00	101.60	5.50	6.10	100
5.00"	Normal	125.00	127.00	5.80	6.40	100
6.00"	Normal	150.00	152.40	6.80	7.20	100
3.00"	Special	75.00	76.20	4.80	5.20	100
4.00"	Special	100.00	101.60	7.30	7.90	100
5.00"	Special	125.00	127.00	8.80	9.40	100
6.00"	Special	150.00	152.40	9.00	9.40	100
8.00"	Special	200.00	203.20	9.00	9.80	20

BATHROOM FITTINGS---



Code-21903
Conceal Bib
Cock Lever
(Orient)



Code-21905
Moving Pillar Cock
Lever (Orient)
(Full Brass)



Code-21913
Two in One Bib
Cock Lever (Orient)



Code-23223
3/4" Conceal
Stop Cock
Flat Lever
(Orient)



Code-21621
Moving Sink Cock
(Essco)
(Full Brass)



Code-21533
Two Handle Moving
Sink Mixer (Essco)
(Full Brass)



Code-21616
Conceal Bib
Cock Filter
(Essco)



Code-23240
3/4" Conceal
Stop Cock
Flat
(Essco)



Code-21918
Fixed Pillar Cock
(Star)



Code-21552
Angle Stop
Cock (Star)



Code-21509
Two Handle
Moving Basin
Mixer (Coaster)
(Full Brass)



Code-21569
Sink Bib Cock
(Coaster)

BATHROOM FITTINGS---



Code-21998
8"Top Pillar Cock (Delux)



Code-21989
Moving Sink Cock
Square Long (Delux)



Code-21983
Moving Pillar Cock
Square Long (Delux)



Code-21986
Moving Sink Cock
Square (Delux) (Full Brass)



Code-23222
Single Lever Basin Mixer



Code-23202
Single Lever Bath Tub Mixer


Code-23226
6" Single lever
top Basin
Mixer



Code-21646
5" Moving Shower
Round
Special



BATHROOM FITTINGS---



Code-21934
3/4" Turn Diverter
Square Shower
Mixer Special
Set with
Pull Spout



Code : 23333
3/4" Conceal Shower Mixer
(push type) set with Hand Shower



Code-23206
Plain Spout with
Handle (Square)



Code-21696
Basin Waste
(Round)



Code-23219
5" Grating Delux

Code- 23339
Basin waste
Delux
(Push Type)



Code-23216
SS Tissue Holder Flat




Code-23227
SS Soap Case (Delux)




Code-23208
Square Towel Rail 24"



Code-23210
Square Multiple Towel Self

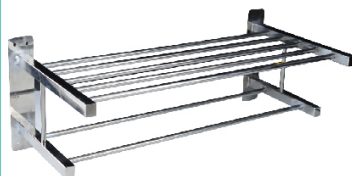

Code-23211
Square Glass Self 24"

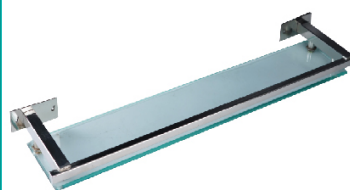

*You can find out
the excellent quality
elegant design of our Product*





HATIM GROUP
Quality is our commitment

HATIM GAS STOVE



HATIM-39

 **HATIM** STEEL STRUCTURE LTD.

GAS STOVE-----



DOUBLE BURNER AUTO GAS STOVE: 2-HCR 12

GAS PRESSURE: 2800 PA/3300PA
HEAT FLOW RATE (KW/H): 3.8, 3.8



DOUBLE BURNER AUTO GAS STOVE(STACY)

GAS PRESSURE: 2000PA/3300PA
HEAT FLOW RATE(KW/H): 3.5, 3.5



DOUBLE BURNER AUTO GAS STOVE : 26 HGR (BLACK)

GAS PRESSURE: 2800 PA/3300PA
HEAT FLOW RATE (KW/H): 3.8 , 4.3



DOUBLE BURNER AUTO GAS STOVE -(DAISY)

GAS PRESSURE: 2000PA/3300PA
HEAT FLOW RATE (KW/H): 3.5, 3.5



DOUBLE BURNER AUTO GAS STOVE

GAS PRESSURE: 2000PA/3300PA
HEAT FLOW RATE (KW/H): 3.5, 3.5



DOUBLE BURNER AUTO GAS STOVE -(MARIGOLD)

GAS PRESSURE: 2000PA/3300PA
HEAT FLOW RATE (KW/H): 3.5, 3.5



SINGLE BURNER AUTO GAS STOVE -(ORCHID)

GAS PRESSURE: 2000PA/3300PA
HEAT FLOW RATE (KW/H): 3.5, 3.5



SINGLE BURNER AUTO GAS STOVE -(RAINBOW)

GAS PRESSURE: 2000PA/3300PA
HEAT FLOW RATE (KW/H): 3.5, 3.5



SINGLE BURNER AUTO GAS STOVE -(CHERRY BLOSSOM)

GAS PRESSURE: 2000PA/3300PA
HEAT FLOW RATE(KW/H): 3.5, 3.5



HATIM STEEL STRUCTURE LTD.

Manufacturer of the ERW- MS Pipe, ASTM A53 ERW-GI Pipe, Electrical steel Conduit, Cable Tray solution

HATIM KITCHEN *Sink*



Round Steel

Smooth Water

Strong Body



CODE- 21830

Hatim Kitchen Sink
Size: 40"x20"
Depth: 200mm/8inch



CODE- 21841

Hatim Kitchen Sink
Size: 17"x15"
Depth: 6.75inch



CODE- 21401

Hatim Kitchen sink
(heavy)
Size: 30"x18"
Depth: 6.75inch




CODE- 21408

Hatim Kichen Sink
(economy)
Size: 36"x18"
Depth: 6inch



CODE- 21405

hatim Kichen sink
(heavy)
Size: 36"x18"
depth: 6.75inch

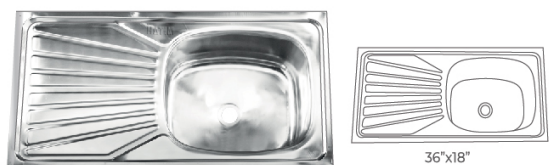


CODE- 21528

Hand made
kitchen sink
Size: 20"x16"
depth:230mm/9inch



CODE- 21849

Hand made
kitchen sink
Size: 30"x18"
depth:230mm/8inch

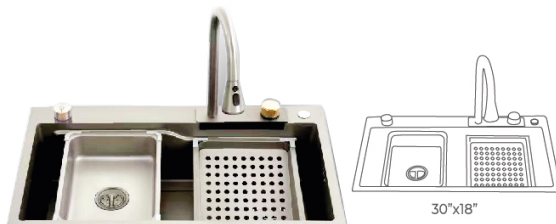

CODE- 21832

Hatim kitchen sink
Size: 30"x18"
depth:230mm/8inch





হাতিম গ্রুপ পাম্প



Hotline:
09612 117722

Product Test Certify



HATIM GROUP
Quality is our commitment



ISO 9001 : 2015
ISO 14001 : 2015

info@hatingroup.com | www.hatingrugh.com

Submersible Water Pump

Sl No.	Code	Model No.	Power		Performance		Delivery
			HP	KW	H(m)	Ltr/mins	
1	77104	SWP 3SDM 1.8/10	0.33	0.25	43-16	05-45	1"
2	77107	SWP 3SDM 1.8/14	0.5	0.37	60-23	05-45	1"
3	77166	SWP 3SDM 2.5/10	0.5	0.37	42-14	05-60	1.25"
4	77167	SWP 3SDM 3.5/9	0.5	0.37	38-12	10-90	1.25"
5	77168	SWP 3SDM 3.5/12	0.75	0.55	50-16	10-90	1.25"
6	77111	SWP 3SDM 2.5/15	0.75	0.55	62-20	05-60	1.25"
7	77114	SWP 3SDM 2.5/20	1	0.75	83-27	05-60	1.25"
8	77163	SWP 3SDM 3.5/16	1	0.75	61-14	10-90	1.25"
9	77164	SWP 3SDM 3.5/20	1.5	1.1	76-18	10-90	1.25"
10	77121	SWP 4SDM 3/13	1	0.75	93-29	05-45	1.25"
11	77122	SWP 4SDM 6/8	1	0.75	58-20	20-140	1.5"
12	77123	SWP 4SDM 4/10	1	0.75	73-23	10-100	1.25"
13	77126	SWP 4SDM 3/17	1.5	1.1	122-39	10-80	1.25"
14	77127	SWP 4SDM 4/14	1.5	1.1	102-32	10-100	1.25"
15	77128	SWP 4SDM 6/11	1.5	1.1	79-27	20-140	1.5"
19	77129	SWP 4SDM 8/9	1.5	1.1	57-17	20-180	2"
17	77131	SWP 4SDM 3/21	2	1.5	151-48	10-80	1.25"
18	77132	SWP 4SDM 6/14	2	1.5	101-34	20-140	1.5"
19	77133	SWP 4SDM 8/12	2	1.5	76-22	20-180	2"
20	77134	SWP 4SDM 10/10	2	1.5	62-14	30-240	2"
21	77169	SWP 4SDM 16/6	2	1.5	36-12	50-350	2"
22	77136	SWP 4SDM 8/18	3	2.2	113-33	20-180	2"
23	77137	SWP 4SDM 10/14	3	2.2	86-20	30-240	2"
24	77140	SWP 4SDM 4/24	3	2.2	174-55	10-100	1.25"
25	77142	SWP 4SDM 6/20	3	2.2	145-49	20-140	1.5"
26	77143	SWP 4SDM 12/12	3	2.2	75-14	30-270	2"
27	77138	SWP 4SDM 12/19 (440 V)	5.5	4	126-26	30-270	2"
28	77139	SWP 4SD 16/16 (440 V)	5.5	4	95-33	50-350	2"
29	77160	SWP 6SRM 45/3	5.5	4	43-11	100-1000	3"
30	77161	SWP 6SR 45/3 (440 V)	5.5	4	43-11	100-1000	3"
31	77146	SWP 4SD 10/22 (440 V)	5.5	4	136-32	30-240	2"
32	77147	SWP 4SD 16/20 (440 V)	7.5	5.5	119-42	50-350	2"
33	77145	SWP 4SD 12/26 (440 V)	7.5	5.5	163-33	30-270	2"
34	77162	SWP 6SRM 45/4	7.5	5.5	57-14	100-1000	3"
35	77144	SWP 4SD 16/24	10	7.5	143-50	50-350	2"


Centrifugal & Jet Pump

Sl No.	Code	Model No.	Power		Performance		Delivery
			HP	KW	H(m)	Ltr/mins	
36	77201	Centrifugal-2HCm25/160 A	3	2.2	68	200	1-1/2"*1"
37	77202	Centrifugal-2HCm25/160 B	2	1.5	58	180	1-1/2"*1"
38	77203	Centrifugal-HCm25/160 A	2	1.5	38	250	1-1/2"*1"
39	77204	Centrifugal-HCm158-1	1	0.75	36	100	1"*1"
40	77205	Centrifugal-HCm170-1	1.5	1.1	41	130	1"*1"
41	77206	Centrifugal-HHm/5B	1	0.75	13.7	600	2"*2"
42	77207	Centrifugal-HHm/6AR	3	2.2	18.5	1300	4"*4"
43	77208	Centrifugal-HHm/6C	1.5	1.1	11.9	1100	3"*3"
44	77301	Jet-HJWm/100XL	0.8	0.6	42	50	1"*1"
45	77302	Jet-HJWm/10M	1	0.75	46	90	1"*1"
46	77303	Jet-HJWm/15M	1.5	1.1	55	90	1"*1"
47	77304	Jet-HJWm/1 B-E	0.7	0.5	41	60	1"*1"
48	77305	Jet-HJWm/3BL	2	1.5	51	180	1-1/4"*1"
49	77306	Jet-HJWm/3CL	1.5	1.1	42	180	1-1/4"*1"
50	77401	Peripheral-HK 50-1	0.15	0.11	20	25	1"*1"
51	77402	Peripheral-HK 60-1	0.5	0.37	40	40	1"*1"
Sl No.	Code	Model No.	Power		Performance		Delivery
			HP	KW	H(m)	Ltr/mins	
52	77209	Centrifugal - IDK14	0.5	0.37	15	60	1"*1"
53	77210	Centrifugal - CPM158	1	0.75	30	100	1"*1"
54	77211	Centrifugal - CPM180	1.5	1.1	41	150	1.25"*1"
55	77307	Jet - JSW 100XL	1	0.75	31	70	1"*1"
56	77308	Jet - JSW 10M	1.1	0.8	41	70	1"*1"
57	77403	Peripheral - PKM 60 Premium	0.5	0.37	40	40	1"*1"





HATIM GROUP
Quality is our commitment

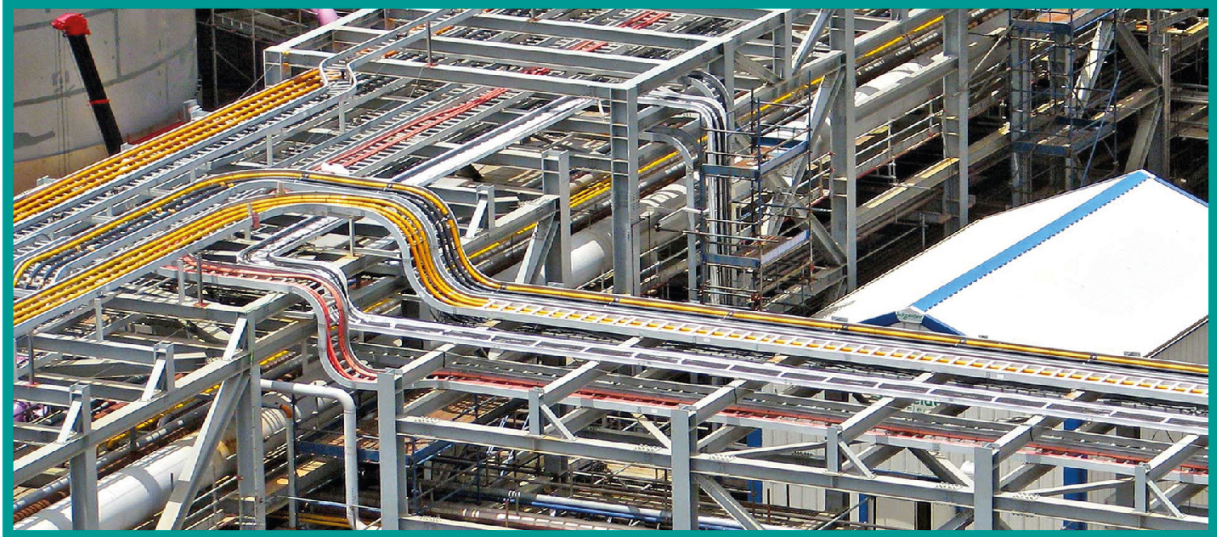


Cable Ladder and cable tray systems

Channel Support Systems and other Associated Supports


Conform standard : EN61537 / IEC61537





Perforated Type Cable Tray

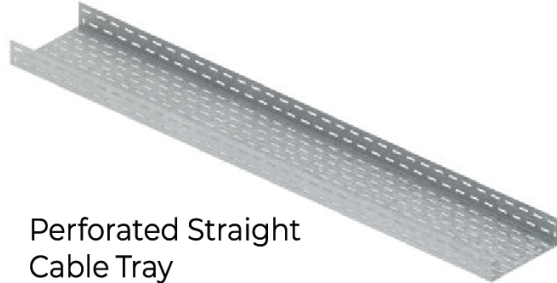


Perforated Straight
Cable Tray

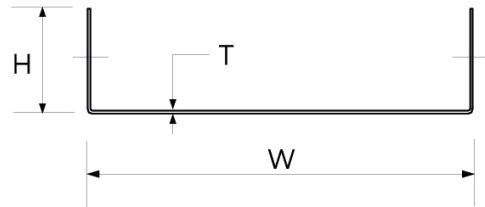

Perforated Inward
Bend Cable Tray

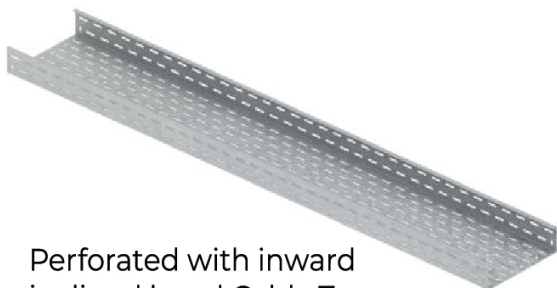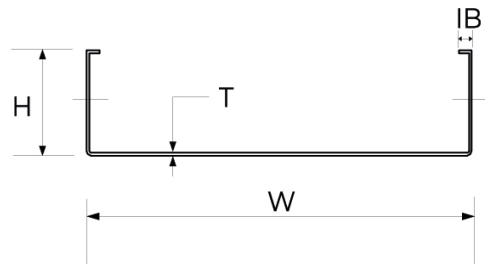

Perforated with inward
inclined bend Cable Tray

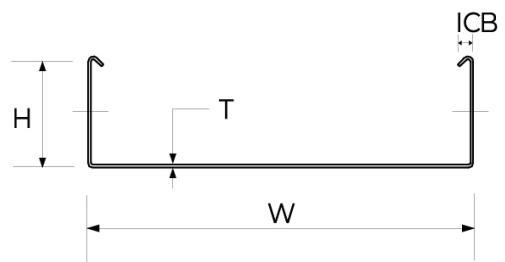


STRENGTH	Light Duty, Medium Duty & Heavy Duty
WIDTH (W)	150mm to 900mm
HEIGHT (H)	25mm to 100mm
THICKNESS (T)	1.00mm, 1.2mm, 1.6mm, 2.00mm
INWARD BEND (IB)	10mm to 25mm
INCLINED BEND (ICB)	10mm to 25mm
OUTWARD BEND (OB)	10mm to 25mm
LENGTH (L)	2400mm, 3000mm




HATIM GROUP
Quality is our Commitment




Horizontal Bend




Cross Bend




Vertical Bend Inside




Counter Reducer




Vertical Bend Outside




Left Hand Reducer



Tee Bend




Right Hand Reducer




TYPES	Horizontal Bend, Inside Vertical Bend, Outside Vertical Bend, Tee Bend, Cross Bend, Reducer, Left Hand Reducer, Right Hand Reducer
BENDING RADIUS	150 mm to 1000 mm
WIDTH (W)	As Per Cable Tray Width
HEIGHT (H)	As Per Cable Tray Height
THICKNESS (T)	1.00 mm, 1.2 mm, 1.6 mm, 2.00 mm



Ladder Type Cable Tray

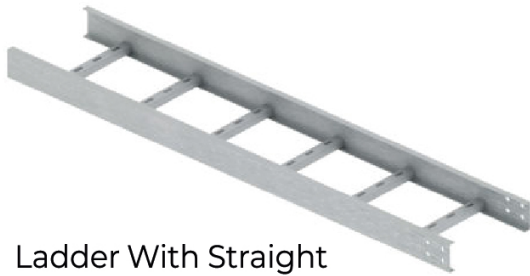

Ladder With Straight Run

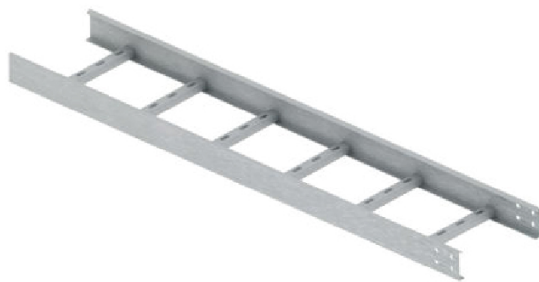

Ladder With Inward Bend



Ladder With Outward Bend




STRENGTH	Light Duty, Medium Duty & Heavy Duty
WIDTH (W)	150 mm to 1000 mm
CHANNEL HEIGHT (H)	50 mm to 150 mm
RUN WIDTH	30mm to 50 mm
RUN HEIGHT	10 mm to 20 mm
RUN CTO C	250 mm / 300 mm
THICKNESS (T)	1.00 mm, 1.2 mm, 1.6 mm, 2.00 mm
INWARD BEND (IB)	10 mm to 25 mm
INCLINED BEND (ICB)	10 mm to 25 mm
OUTWARD BEND (OB)	10 mm to 25 mm
LENGTH (L)	2400 mm, 3000 mm




HATIM GROUP
Quality is our Commitment



Ladder Cable Tray Accessories

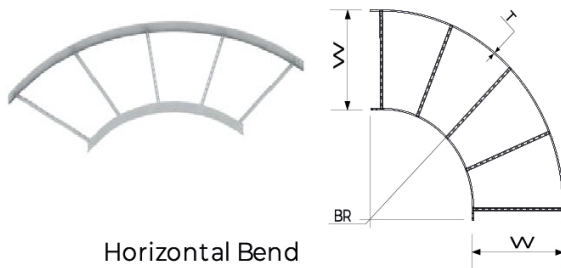


Horizontal Bend





Cross Bend

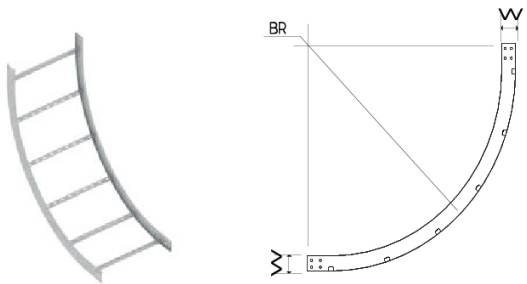


Vertical Bend Inside





Counter Reducer

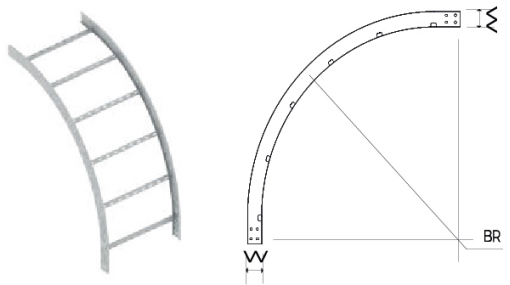



Vertical Bend Outside




Left Hand Reducer



Tee Bend



Right Hand Reducer




TYPES	Horizontal Bend, Inside Vertical Bend, Outside Vertical Bend, Tee Bend, Cross Bend, Reducer, Left Hand Reducer, Right Hand Reducer
BENDING RADIUS	150mm to 1000mm
WIDTH (W)	As Per Cable Tray Width
HEIGHT (H)	As Per Cable Tray Height
THICKNESS (T)	1.00mm, 1.2mm, 1.6mm, 2.00mm



Cable Management

BS4568 & BS31 Conduit & Fittings

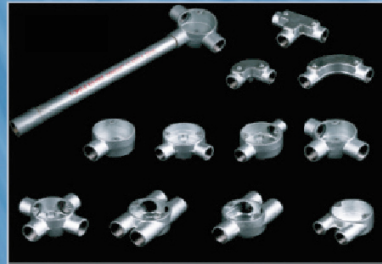


**HATIM POLYMER LTD.
HATIM INDUSTRIES LTD.
HATIM STEEL STRUCTURE LTD.**

www.hatimgroup.com


GI CONDUIT(To BS 4568,BS 31)



Class3

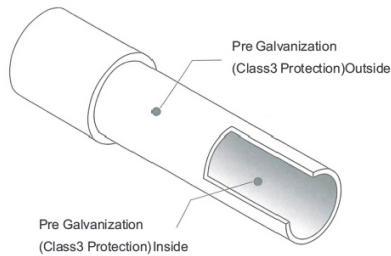

Class4

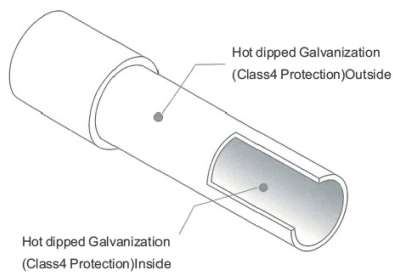


BS4568-1970 GI CONDUIT

Size (mm)	Outside Diameter		Wall Thickness (mm)	Length (meters)	Length of Thread		Primary Bundle (pcs)
	Min	Max			Min	Max	
Heavy Gauge							
20	19.7mm	20.0mm	1.6±0.15	3.75	13.0mm	15.0mm	10
25	24.6mm	25.0mm	1.6±0.15	3.75	16.0mm	18.0mm	10
32	31.6mm	32.0mm	1.6±0.15	3.75	18.0mm	20.0mm	10
40	39.6mm	40.0mm	1.8±0.15	3.75	19.0mm	22.0mm	3
50	49.6mm	50.0mm	1.8±0.15	3.75	19.0mm	22.0mm	3
Light Gauge							
20	19.7mm	20.0mm	1.20±0.05	3.75	13.0mm	15.0mm	10
25	24.7mm	25.0mm	1.20±0.05	3.75	16.0mm	18.0mm	10
32	31.7mm	32.0mm	1.20±0.05	3.75	18.0mm	20.0mm	10

BS31-1940 GI CONDUIT

Size (mm)	Outside Diameter		Wall Thickness (mm)	Length (meters)	Length of Thread		Primary Bundle (pcs)
	Min	Max			Min	Max	
Heavy Gauge							
3/4"	18.9mm	19.05mm	1.6±0.15	3.81	11.5mm	13.5mm	10
1"	25.2mm	25.4mm	1.6±0.15	3.81	13.0mm	15.0mm	10
1¼"	31.5mm	31.8mm	1.6±0.15	3.81	16.0mm	18.0mm	10
1½"	37.8mm	38.0mm	1.8±0.15	3.81	19.0mm	22.0mm	3
2"	50.4mm	50.6mm	1.8±0.15	3.81	19.0mm	22.0mm	3
Light Gauge							
3/4"	18.9mm	19.05mm	1.6±0.15	3.81	11.5mm	13.5mm	10
1"	25.2mm	25.4mm	1.6±0.15	3.81	13.0mm	15.0mm	10
1¼"	31.5mm	31.8mm	1.6±0.15	3.81	16.0mm	18.0mm	10
1½"	37.8mm	38.0mm	1.8±0.15	3.81	19.0mm	22.0mm	3
2"	50.4mm	50.6mm	1.8±0.15	3.81	19.0mm	22.0mm	3

Note: All Information available at the time of order
if you need other thickness, length and packing pls contact us

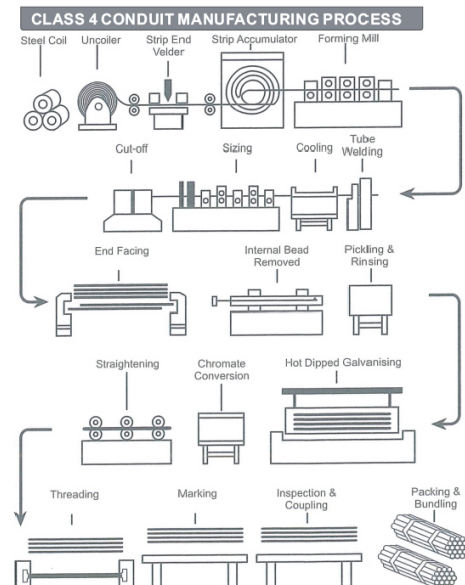

Tel :+88-02-9515871-3,954371-3

HATIM
www.hatimgroup.com

hatim_pipes@yahoo.com

HATIM SWITCH & SOCKET BOXES

One Gang

Material: Steel Plate

Pre-Galvanised

Item Code	Size(mm) (LxWxHxT)	Knockout's	Pcs/Carton
HG-P12510	72 X 72 X 25 X 1.0	12x20mm	200
HG-P12512	72 X 72 X 25 X 1.2	12x20mm	200
HG-P13510	72 X 72 X 35 X 1.0	7x20mm, 4x25mm	200
HG-P13512	72 X 72 X 35 X 1.2	7x20mm,4x25mm	200
HG-P14710	72 X 72 X 47 X 1.0	10x20mm,1x25mm	100
HG-P14712	72 X 72 X 47 X 1.2	10x20mm,1x25mm	100

*All above come with one brass earth terminal, one adjustable and there fixed lugs

*Other specification and thickness can be supplied upon request



Two Gang

Material: Steel Plate

Pre-Galvanised

Item Code	Size(mm) (LxWxHxT)	Knockout's	Pcs/Carton
HG-P22510	132 X 72 X 25 X 1.0	16x20mm	100
HG-P22512	132 X 72 X 25 X 1.2	16x20mm	100
HG-P23510	132 X 72 X 35 X 1.0	13x20mm,3x25mm	100
HG-P23512	132 X 72 X 35 X 1.2	13x20mm,3x25mm	100
HG-P24710	132 X 72 X 47 X 1.0	10x20mm,6x25mm	100
HG-P24712	132 X 72 X 47 X 1.2	10x20mm,6x25mm	100

*All above come with one brass earth terminal, one adjustable and there fixed lugs

*Other specification and thickness can be supplied upon request



BS 4568-2/BS EN 50086-1/ BS EN 50086-1-1 / BSEN 61386-21

ADAPTABLE BOXES


Adaptable Box With Screw & Cover

Two Gang

Material: Steel Plate

Pre-Galvanised

Item Code	Size(mm) (LxWxHxT)	Pcs/Carton
HG-KB075-37-SC	75x75x37.5	100
HG-KB075-50-SC	75x75x50	100
HG-KB075-37-SC	100x100x37.5	100
HG-KB075-50-SC	100x100x50	80
HG-KB075-75-SC	100x100x75	60
HG-KB075-75-SC	150x150x75	20
HG-KB075-100-SC	150x150x100	20
HG-KB075-75-SC	225x225x75	10
HG-KB075-100-SC	225x225x100	5
HG-KB075-100-SC	300x300x100	5

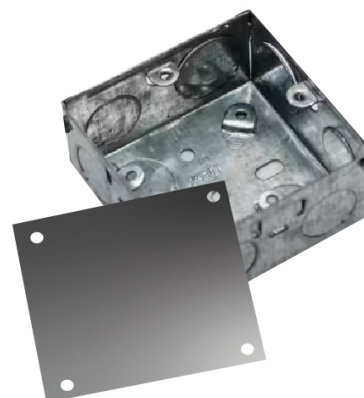

BEDROOM SET



SIZE: 27 W x 26.8 D x 29 H (Inch)

Wooden King Bed-HBDH-326



SIZE: 39.5 W x 24 D x 78.6 H (Inch)

**Wooden Cupboard
(2 Doors)-HCBH-326**



SIZE: 60 W x 24 D x 48 H (Inch)

Wooden Wardrobe-HWDH-326



SIZE: 59.6 W x 23.8 D x 75.7 H (Inch)

**Wooden Cupboard-HCBH
(3 Doors)-324**

SOFA CUM BED



SIZE: 65.75 W x 37 D x 33.85 H (Inch)

Sofa Cum Bed-HSCB-309-sofa



SIZE: 63 W x 31 D x 35 H (Inch)

Sofa Set-HSDC-349-Double



SIZE: 31.5 W x 28.3 D x 22.4 H (Inch)

Accent Chair-HACR-301



SIZE: 50 W x 21 D x 25.6 H (Inch)

Wooden Divan-HDSH-308

SOFA

DIVAN

NANDONIK PRODUCT



SIZE: 36 W x 21 D x 72 H (Inch)

**Nandonik Cupboard
(Emerald) HCBH-107**



SIZE: 82 W x 61 D x 32 H (Inch)

**Gen Z-Semi Double BED
(Cybernaut) HBSDH-111**



SIZE: 63 W x 39.5 D x 30 H (Inch)

**DINING TABLE-HTDH-316,
HCFD-316(1+6)**



SIZE: 39 W x 20 D x 76 H (Inch)

**Trendy Household Almirah-HAFH
205-Humming Bird (Choco)**

DINING SET

KIDS PRODUCT



SIZE: 83 W x 41.5 D x 32 H (Inch)

**Wooden Kids Bed
(Rocket) HBKSH-303**



SIZE: 20 W x 16 D x 67 H (Inch)

**Wooden Kids Dressing Table
(Protective Umbrella) - HKDTH-302**



SIZE: 20 W x 16 D x 67 H (Inch)

**Wooden Kids Dressing Table
(Moon in cloudy sky- Pink) - HKDTH-304**



SIZE: 20 W x 16 D x 67 H (Inch)

**Wooden Kids Chest of Drawer (4 Drawer)
(Protective Umbrella) HKCDH-302**



HATIM

FURNITURE

Where Quality Meets Style

CLASSROOM FURNITURE



www.hatimfurniturebd.com



09612117722

HATIM-55


HatimFurniture

/hatimfurniture

@hatim.furniture


High Bench

Bench Top Raw material	Polypropylene Impact Copolymer Plastic
Size Of High Bench	1450mm (L) x 425mm (W) x 730mm(H)
Plastic Frame Top Weight & Thickness	Job Wall Thickness: 5mm Side Wall Height : 25mm Side Wall Thickness: 5mm Plastic Frame Weight: 5000gm
Ribs	Vertical Ribs: 25 nos Horizontal Ribs: 07 nos Ribs Height: 12mm All Ribs Thickness: 4mm

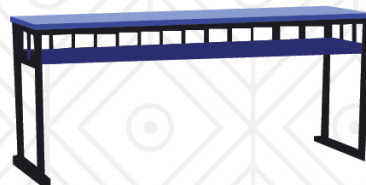

Low Bench

Bench Top Raw material	Polypropylene Impact Copolymer Plastic
Size Of High Bench	1395mm (L) x 305mm(W)x 380mm(H)
Plastic Frame Top Weight & Thickness	Job Wall Thickness: 5mm Side Wall Height : 25mm Side Wall Thickness: 5mm Plastic Frame Weight: 3000gm
Ribs	Vertical Ribs: 21 nos Horizontal Ribs: 07 nos Ribs Height: 12mm All Ribs Thickness: 4mm



Teacher's Table

Table Top Raw Material	Polypropylene Impact Copolymer Plastic
Size	838mm(L)x533mm(W)x775mm(H)
Table Top Dimension	838mm(L)x533mm(W)x25mm(H)
Steel Tube Specification	25mmx25mmx1.2mm



Teacher's Chair

Chair Seat Raw Material	Polypropylene Impact Copolymer Plastic
Size	550mm(L)x520mm(W)x850mm(H)
Chair Top	465mm(L)x480mm(W)x425mm(H)
Steel Tube Specification	Round Tube-25mmx1.2mm



- ✓ ফুড গ্রেড পাস্টিক রং
- ✓ স্টেইনলেস স্টীল লক
- ✓ স্বাস্থ্যকর এবং নিরাপদ
- ✓ শক্তিশালী এবং টেকসই
- ✓ বিশাল স্টোরেজ স্পেস
- ✓ রান্নাঘরের সেরা ব্যবহার।
- ✓ ব্যবহার করা সহজ এবং পরিষ্কার

HATIM
FURNITURE

Where Quality Meets Style

রান্নাঘরের নতুন সাজে

হাতিম কিচেন সেলফ



09612117722

HATIM-57

▶ HatimFurniture
f /hatimfurniture
@hatim.furniture

www.hatimfurniturebd.com

Product Name:	Hatim Kitchen Shelf Medium (Blue)-M
Dimension:	32"X16"X64"



Product Name:	Hatim Kitchen Shelf Class 4 Door (Blue)-M
Dimension:	36.2"X16"X70"



Product Name:	Hatim Kitchen Shelf Trendy 2 Door (Blue)-M
Dimension:	28"X16"X58.6"



OUR ISO CERTIFICATE



This is to certify that the Quality Management System of

Hatim Industries Limited

279, Morkun, Tongi, Gazipur, Bangladesh

has been assessed as conforming to the requirements of

ISO 9001:2015

For the following Scope:

Manufacture of Electric Resistance Welded Mild Steel (ERWMS), Furniture Pipes, Galvanized Iron (GI) Pipes, ASTM A53 ERW GI Pipe, Electrical Steel Conduit & Accessories and Cable Management System

Certificate No:
A2-1363Q

Date of Issuance:
23-Oct-2024

Date of Expiry:
22-Oct-2027

(Subject to ongoing successful surveillance audits and maintenance of relevant management system requirements as per Standard Solutions Europe Ltd regulations)

James Lee

Authorized Signatory



Standard Solutions Europe Ltd.
Office No 19, 1-13 Adler Street, London, E1 1EG, United Kingdom - www.standard-solutions.com



This is to certify that the Integrated Management System of

Hatim Industries Limited

279, Morkun, Tongi, Gazipur, Bangladesh

has been assessed as conforming to the requirements of

ISO 14001:2015 & ISO 45001:2018

For the following Scope:

Manufacture of electric resistance welded (ERW) mild steel square, rectangular, round and elliptical pipes, galvanized iron(GI) pipes, ASTM A53 and A795 standard carbon steel ERW and carbon steel galvanized schedule 40 pipes, electrical steel conduit & accessories, galvanized cable tray management system

Certificate No:
A2-1375IMS

Date of Issuance:
20-Dec-2024

Date of Expiry:
19-Dec-2027

(Subject to ongoing successful surveillance audits and maintenance of relevant management system requirements as per Standard Solutions Europe Ltd regulations)

James Lee

Authorized Signatory



Standard Solutions Europe Ltd.
Office No 19, 1-13 Adler Street, London, E1 1EG, United Kingdom - www.standard-solutions.com



This is to certify that the Quality Management System of

Hatim Polymer Limited

279, Morkun, Tongi, Gazipur, Bangladesh

has been assessed as conforming to the requirements of

ISO 9001:2015

For the following Scope:

Manufacture of UPVC Pipe, Conduit Pipe, Suction Hose, PP-R Pipe, HDPE Pipe and CPVC Pipe

Certificate No:
A2-1362Q

Date of Issuance:
23-Oct-2024

Date of Expiry:
22-Oct-2027

(Subject to ongoing successful surveillance audits and maintenance of relevant management system requirements as per Standard Solutions Europe Ltd regulations)

James Lee

Authorized Signatory



Standard Solutions Europe Ltd.
Office No 19, 1-13 Adler Street, London, E1 1EG, United Kingdom - www.standard-solutions.com



This is to certify that the Integrated Management System of

Hatim Steel Structure Limited

184/1, Ariab, Rupshi, Rupganj, Narayanganj; Rupganj PS; Narayanganj 1460, Bangladesh

has been assessed as conforming to the requirements of

ISO 9001:2015 & ISO 14001:2015

For the following Scope:

Development, manufacturing & sales of furniture (for home, office, industry & hospital) & doors, bathroom fittings, steel conduit fittings (electro-galvanized, electroplating), stainless steel pipe, gas stove & sink and industrial pipe support, steel framing solutions for the installation of mechanical, electrical equipment & services cable tray & related accessories, Plastic furniture and UPVC fittings

Certificate No:
A2-1361IMS

Date of Issuance:
14-Oct-2024

Date of Expiry:
13-Oct-2027

(Subject to ongoing successful surveillance audits and maintenance of relevant management system requirements as per Standard Solutions Europe Ltd regulations)

James Lee

Authorized Signatory



Standard Solutions Europe Ltd.
Office No 19, 1-13 Adler Street, London, E1 1EG, United Kingdom - www.standard-solutions.com



List of our valuable user



OUR PRODUCTS

● GI Pipe & GI Conduit

● GI Fittings

● FMS Furniture Pipe

● MS Pipe (Square, Round & Rectangular)

● ASTM Schedule Pipe A53

● Double Wall Corrugated Pipe

● Class Pipe

● CpvC Pipe & Fittings

● Solvent Cement

● Bathroom Fittings Plastic

● Bathroom Fittings Metal

● PPR Pipe & Fittings

● Pump (Surface & Submersible)

● Upvc Thread Pipe

● Upvc Thread Fittings

● Electric Upvc Pipe & Fittings

● Cable Tray & Trunking System

● Rib & Robo Filter

● HDPE Coil Pipe & Fittings

● HDPE Duct Pipe & Fittings

● Garden Hose Pipe

● Suction Hose Pipe

● SWR Pipe

● Filter Pipe

● Upvc Pipe

● Upvc Fittings

● Upvc Filter

● SS Polish Sheet

● SS Round Pipe (Grade 201/304)

● SS Square Box Pipe

● SS Design Pipe

● Hatim Gas Stove

● Hatim Stainless Steel Sink


● Telecommunication Tower

● Hatim Furniture

● Teflon Tape




HATIM GROUP
Quality is our Commitment

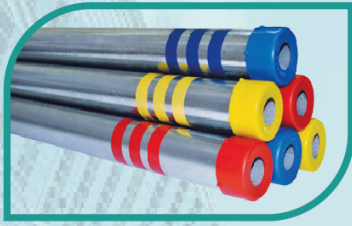

GI PIPE




MS PIPE

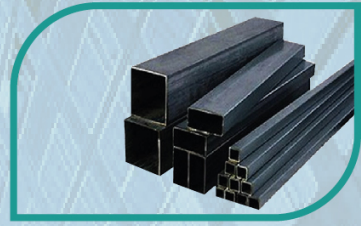


MS Box PIPE




ERW WELDED PIPE




SS PIPE

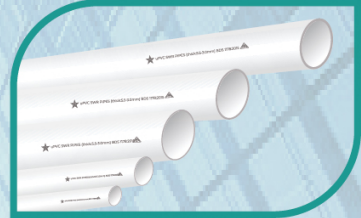


uPVC SWR PIPE

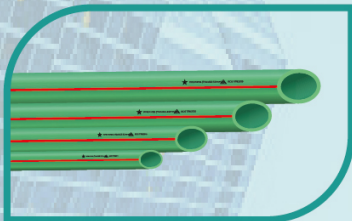

PPR PIPE



HDPE PIPE

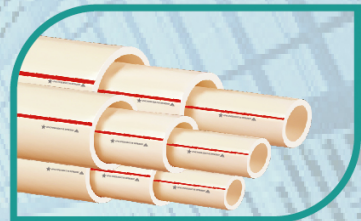

CPVC PIPE




CONDUIT PIPE



THREAD PIPE



GARDEN HOSE PIPE

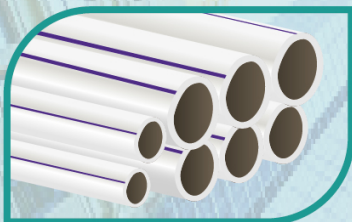

PLUMBING PIPE



CABLE CASING PIPE



GAS STOVE



KITCHEN SINK



WATER PUMP



BATHROOM FITTINGS

Factory-01:
🏠 279, Morkun, Tongi, Gazipur,
Bangladesh

Factory-02:
🏠 184/1 Ariabo, Rupshi, Tarabo
Rupgong, Narayangong, BD

🌐 info@hatimgroup.com
www.hatimgroph.com



Hotline:
09612 117722



HATIM GROUP
Quality is our commitment